

Your safety is our focus

Safety related special products

Pilot air control valve with spring return spool


SY-X310 Series

Pilot air control valve with spring return spool

SY-X310 Series



- ▶ **We focus on machinery safety as a key part of our product development strategy. We have just developed a new version of our SY valve that will help you to satisfy your machine safety system requirements.**

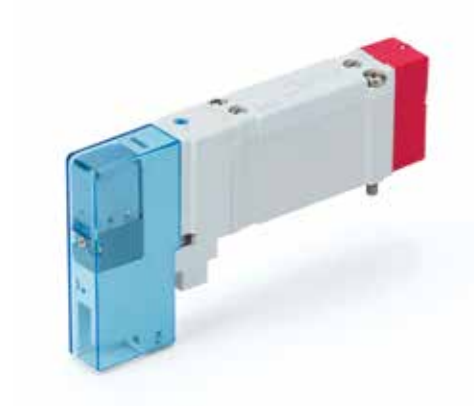

Main Features

- ▶ **A pilot air control valve with spool detection – The concept**

The SY-X310 version controls the pilot air of manifold zones.
The safe position is the spring-actuated position.

- ▶ **Validated according to ISO 13849-2**

This product is capable of meeting the relevant basic and well-trying safety principles.
Please request our validation document for the details.

- ▶ **SISTEMA library is available**

SY safety valves data are integrated into SISTEMA free software tool.
Download it from our website and be ready to build your safety function.

- ▶ **Still an option of our SY, the all-purpose valve**

Benefit from the high versatility this series gives you and create your own configuration, tailored to your needs.



Applications

Controlling the Pilot air of valve manifold. Thus, it is required to equip the manifold with external pilot air valve.
For achieving a diagnostic coverage, SMC recommends to use a suitable pressure detection switch:

- SY5000: F08-2000-M12-M
- SY7000: F08-7000-M12-M

How to Order

Base mounted SY5100 - NZ1 - - X310
 Top ported SY5130 - NZ1 - - - X310
 ① ② ③ ④ ⑤

① Coil type

—	Standard
T	With power saving circuit

② Rated voltage

5	24 VDC
6	12 VDC

③ A, B port size

01	1/8"
C4	One touch fittings for Ø 4 tube
C6	One touch fittings for Ø 6 tube
C8	One touch fittings for Ø 8 tube

④ Thread type (applies to 1/8" port only)


—	Rc
F	G
N	NPT
T	NPTF

⑤ Type of mounting screw

Nil	Round head combination screw
K	Round head combination screw (retained)
H	Hex socket head cap screw (retained)

Selected Part Numbers

Part number	Max. flow rate cfm (l/min)	Operating pressure range psi (MPa)
SY5100T-5NZ1-X310	36.8 (1042)	22 to 101 (0.15 - 0.7)

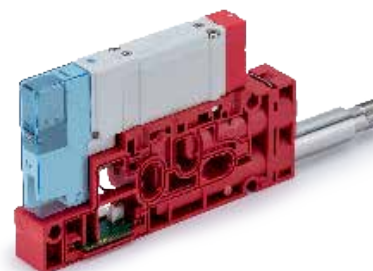

Ⓐ Plug-in Sub-plate

Part number	Valve series	Max. flow rate cfm (l/min)	Operating pressure range psi (MPa)
SY50M-2-14SA-C0	SY 5000	36.8 (1042)	22 to 101 (0.15 - 0.7)
SY70M-2-19DA-C0	SY 7000	56.2 (1590)	22 to 101 (0.15 - 0.7)

Note) Requires external pilot end block for pilot exhaust


Ⓑ Pressure Detection for SY310

Part number	Valve series
F08-2000-M12-M	SY 5000
F08-7000-M12-M	SY 7000

Ⓒ Port Plug for Sub-plates

Part number	Valve series
VVQ1000-58A	SY 5000
VVQ2000-58A	SY 7000

Note) See SY catalog for additional fitting options

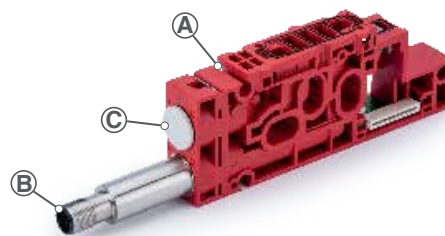


Valve Specifications


Valve type		5 port solenoid valve
Valve type		Rubber seal
Type of actuation		2-position single/spring and air return type
Fluid		Air
Operating pressure range		22 to 101 psi (0.15 to 0.7MPa)
Ambient and fluid temperature		14 to 122°F (-10 to 50°C)
Manual override		Non-locking push type
Min. operating frequency (Hz)		1 cycle every 30 days
Max. operating frequency (Hz)		5
Response time		31 ms or less @ 72 psi (0.5 MPa)
Lubrication		Not required
Mounting orientation		Unrestricted
Impact/Vibration resistance (m/s ²)		150/30
Enclosure		IEC529 standard IP67
Filtration		5 μm filtration or similar
Coil rated voltage (DC)		24 V
Allowable voltage fluctuation (V)	Standard	24 VDC: -7 to 10%
		12 VDC: -4 to 10%
	With power saving circuit	24 VDC: -8 to 10%
		12 VDC: -6 to 10%
Power consumption (W)	Standard	0.4
	With power saving circuit	0.1 (inrush 0.35, holding 0.1)
Surge voltage suppressor		Diode (varistor for non-polar type)
Indicator light		LED

Symbols

Valve

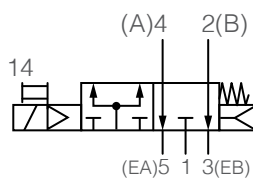

Manifold Block

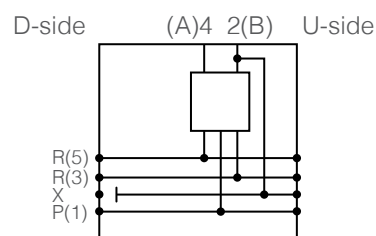

Pilot air control valve with spring return spool

SY-X310 Series



Manifold Flow characteristics ¹⁾

Plug-in metal base

Series	Piping option	Port size		Valve flow-rate characteristics					
		1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1→4/2 (P→A/B)			4/2→5/3 (A/B→E)		
				C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾	C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾
SY5000	Side ported	1/4	C8	2.6	0.28	653	2.6	0.14	603
	Bottom ported	1/4	C8	2.7	0.35	709	2.8	0.20	671

Resin base

Series	Piping option	Port size		Valve flow-rate characteristics					
		1, 5, 3 (P, EA, EB)	4, 2 (A, B)	1→4/2 (P→A/B)			4/2→5/3 (A/B→E)		
				C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾	C [dm ³ /(s·bar)]	b	Q [l/min] (ANR) ²⁾
SY5000	Side ported	C10	C8	3.3	0.30	839	3.6	0.17	848
	Bottom ported	C10	C8	3.3	0.29	834	4.2	0.26	1042

1) The value is for manifold base with 5 stations and individually operated 2-position type.

2) These values have been calculated according to ISO 6358 and indicate the flow rate under standard conditions with an inlet pressure of 87 psi (0.6 MPa) (relative pressure) and a pressure drop of 14.5 psi (0.1 MPa).

3) These values are applicable to rubber seal type valves.

Dimensions

Dimensions are the same as the standard product.



Global Manufacturing, Distribution and Service Network

Worldwide Subsidiaries

EUROPE

AUSTRIA
SMC Pneumatik GmbH (Austria)

BELGIUM
SMC Pneumatics N.V./S.A.

BULGARIA
SMC Industrial Automation Bulgaria EOOD

CROATIA
SMC Industrijska Automatika d.o.o.

CZECH REPUBLIC
SMC Industrial Automation CZ s.r.o.

DENMARK
SMC Pneumatik A/S

ESTONIA
SMC Pneumatics Estonia

FINLAND
SMC Pneumatics Finland OY

FRANCE
SMC Pneumatique S.A.

GERMANY
SMC Pneumatik GmbH

GREECE
SMC Hellas EPE

HUNGARY
SMC Hungary Ipari Automatizálási Kft.

IRELAND
SMC Pneumatics (Ireland) Ltd.

ITALY
SMC Italia S.p.A.

KAZAKHSTAN
LLP "SMC Kazakhstan"

LATVIA
SMC Pneumatics Latvia SIA

LITHUANIA
UAB "SMC Pneumatics"

NETHERLANDS
SMC Pneumatics B.V.

NORWAY
SMC Pneumatics Norway AS

POLAND
SMC Industrial Automation Polska Sp. z o.o.

ROMANIA
SMC Romania S.r.l.

RUSSIA
SMC Pneumatik LLC.

SLOVAKIA
SMC Priemysel'ná Automatizácia, Spol s.r.o.

SLOVENIA
SMC Industrijska Avtomatika d.o.o.

SPAIN / PORTUGAL
SMC España, S.A.

SWEDEN
SMC Pneumatics Sweden AB

SWITZERLAND
SMC Pneumatik AG

TURKEY
SMC Pnömatik Sanayi Ticaret ve Servis A.Ş.

UK
SMC Pneumatics (U.K.) Ltd.

ASIA / OCEANIA

AUSTRALIA
SMC Pneumatics (Australia) Pty. Ltd.

CHINA
SMC (China) Co., Ltd.
SMC Pneumatics (Guangzhou) Ltd.

HONG KONG
SMC Pneumatics (Hong kong) Ltd.

INDIA
SMC Pneumatics (India) Pvt. Ltd.

INDONESIA
PT. SMC Pneumatics Indonesia

JAPAN
SMC Corporation

MALAYSIA
SMC Pneumatics (S.E.A.) Sdn. Bhd.

NEW ZEALAND
SMC Pneumatics (N.Z.) Ltd.

PHILIPPINES
Shoketsu SMC Corporation

SINGAPORE
SMC Pneumatics (S.E.A.) Pte. Ltd.

SOUTH KOREA
SMC Pneumatics Korea Co., Ltd.

TAIWAN
SMC Pneumatics (Taiwan) Co., Ltd.

THAILAND
SMC (Thailand) Ltd.

UNITED ARAB EMIRATES
SMC Pneumatics Middle East FZE

VIETNAM
SMC Pneumatics (VN) Co., Ltd

AFRICA

SOUTH AFRICA
SMC Pneumatics (South Africa) Pty Ltd

NORTH, CENTRAL & SOUTH AMERICA

ARGENTINA
SMC Argentina S.A.

BOLIVIA
SMC Pneumatics Bolivia S.R.L.

BRAZIL
SMC Pneumáticos do Brasil Ltda.

CANADA
SMC Pneumatics (Canada) Ltd.

CHILE
SMC Pneumatics (Chile) S.A.

COLOMBIA
SMC Colombia Sucursal de SMC Chile, S.A.

MEXICO
SMC Corporation (Mexico) S.A. de C.V.

PERU
SMC Corporation Peru S.A.C.

USA
SMC Corporation of America

VENEZUELA
SMC Neumatica Venezuela S.A.

U.S. & Canadian Sales Offices

WEST

Austin
Dallas
Los Angeles
Phoenix
Portland
San Jose

CENTRAL


Chicago
Cincinnati
Cleveland
Detroit
Des Moines
Grand Rapids
Indianapolis
Kansas City
Milwaukee
Minneapolis
St. Louis

EAST

Albany
Atlanta
Birmingham
Boston
Charlotte
Knoxville
Nashville
New Jersey
Rochester
Tampa

CANADA

Vancouver
Toronto
Windsor
Montreal

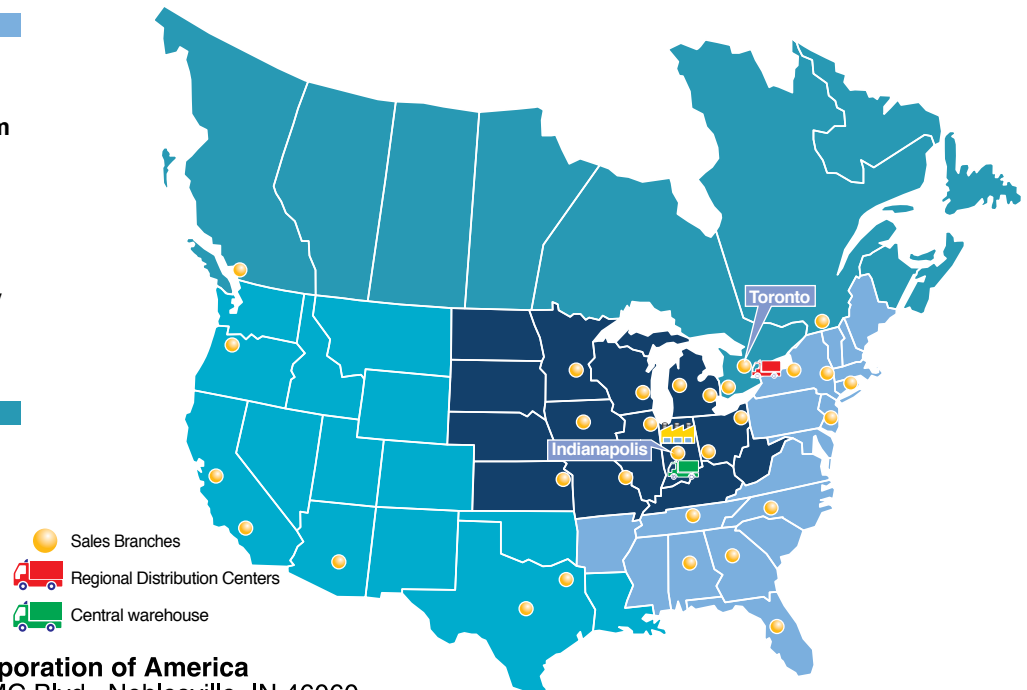

SMC Corporation of America
10100 SMC Blvd., Noblesville, IN 46060
www.smcusa.com

SMC Automation (Canada) Ltd.
www.smcautomation.ca

(800) SMC.SMC1 (762-7621)
e-mail: sales@smcusa.com
International inquiries: www.smcworld.com

