



# Pneumatics for Outdoor Applications

*UV Resistant Components*



*Water Removal Units*



*All Metal or SUS 316  
Filter/Regulator  
Combo Unit*



*Tie Rod Cylinders  
with Viton™ Seals*



*SUS 2-way  
Solenoid Valve*



*Jet Pulse  
Dust Collector Valves*



*SUS Floating Joint  
with Silicone Cover*



*Fittings & Tubing*



*SUS Lockout-  
Tagout (LOTO)*




*All Metal  
Speed Controller*

[www.smcusa.com](http://www.smcusa.com)  
[sales@smcusa.com](mailto:sales@smcusa.com)



# Air Shocker Series XT316

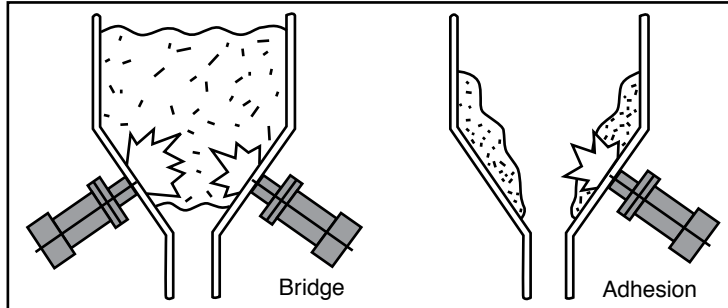

## Specifications

Model	XT316-30B	XT316-40B	XT316-63B	XT316-80B	XT316-100B
Bore size	Ø30	Ø40	Ø63	Ø80	Ø100
Operating pressure MPa (kgf/cm <sup>2</sup> )	0.4 - 0.6 (4.1 - 6.1)				
Impact cycle (cycles/min)	MAX. 15				
Air consumption (ℓ/cycles)	0.33	0.75	1.29	1.91	4
(Note 1) Impact energy (kgm)	0.05 - 0.07	0.17 - 0.31	0.45 - 0.75	1.0 - 1.8	2.2 - 4.0
(Note 2) Weight (kg)	2.5	4.4	11.2	15	33.5
Ambient and fluid temperature	32 - 140 °F (0 - 60 °C)				
Port size (PT)	1/8				3/8
Lubrication	Not lubricated				

(Note 1) Change in potential energy applied to a pendulum  
(Note 2) Total weight including the mounting base and bolts

## U.S. & Canadian Sales Offices

### WEST

Austin  
Dallas  
Denver  
Los Angeles  
Phoenix  
Portland  
San Jose

### CENTRAL


Chicago  
Cincinnati  
Cleveland  
Detroit  
Des Moines  
Grand Rapids  
Indianapolis  
Kansas City  
Milwaukee  
Minneapolis  
St. Louis

### EAST

Albany  
Atlanta  
Birmingham  
Boston  
Charlotte  
Knoxville  
Nashville  
New Jersey  
Rochester  
Tampa

### CANADA

Vancouver  
Toronto  
Windsor  
Montreal

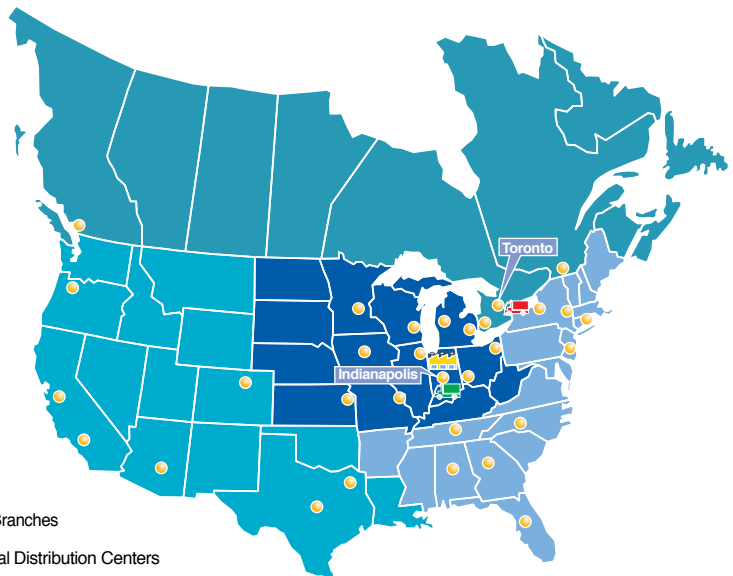

ZR-RRD-3M