



Active links to catalog
pages 3-21

Contents

	Equal Leg Couplers.....	Page 3	
	Reduction Couplers.....	Page 4,5	
	Reduction Elbows.....	Page 4,5	
	Threaded Elbows (NPT, UNF, Tapered).....	Page 6,7	
	Threaded Elbows  British Standard Pipe Thread.....	Page 8	
	Equal Barbed Elbows.....	Page 9	
	Thread to Barb Adapters (NPT, UNF, Tapered).....	Page 10, 11	
	Thread to Barb Adapters  British Standard Pipe Thread.....	Page 12	
	Equal Barbed Tees.....	Page 13	
	Thread to Barb Tees (NPT).....	Page 14,15	
	Reduction Barbed Tees.....	Page 14,15	
	Thread to Barb Tees  British Standard Pipe Thread.....	Page 16	
	Threaded Hex Nipples (NPT, UNF, Tapered).....	Page 17	
	Threaded Hex Plugs (NPT).....	Page 18,19	
	Threaded Hex Plugs  British Standard Pipe Thread.....	Page 18,19	
	Y Connectors.....	Page 18,19	
	Threaded Hex Reduction Nipples (NPT).....	Page 20	
	Schedule 80 Fittings (NPT).....	Page 21	
	Swivel Disconnects.....	Page 22-27	
	Kent System™ Quick Disconnect Fittings.....	Page 28-32	
	Kits.....	Page 32	
	Stainless Steel 316L.....	Page 33-35	
	Clamps and Accessories.....	Page 36-37	
	Tubing.....	Page 37-39	
	Technical Information.....	Please call	
	(Typical properties of resins, chemical resistance charts, technical drawings, sterilization stability of resin materials)		




Eldon James Corp.



Loveland CO 80538

Ph. (970) 667-2728 • eldonjames.com • fax (970) 667-3204



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Ultimate Chemical Resistance

ISO 9001

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/16"	C0-1NK*	.21	.26	.38
3/32"	C0-1.5NK*	.22	.28	.40
1/8"	C0-2NK*	.23	.29	.42
5/32"	C0-2.5NK	.40	.50	.73
3/16"	C0-3NK	.44	.55	.81
1/4"	C0-4NK	.57	.71	1.04
5/16"	C0-5NK	.62	.78	1.13
3/8"	C0-6NK	.67	.84	1.23
1/2"	C0-8NK	.79	.99	1.45
5/8"	C0-10NK	.91	1.14	1.67
3/4"	C0-12NK	1.16	1.15	2.12
1"	C0-16NK	1.51	1.89	2.76


Natural Polypropylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/16"	C0 -1NP	.14	.18	.26
3/32"	C0-1.5NP	.14	.18	.26
1/8"	C0-2NP	.14	.18	.26
5/32"	C0-2.5NP	.23	.29	.42
3/16"	C0-3NP	.23	.29	.42
1/4"	C0-4NP	.13	.16	.24
5/16"	C0-5NP	.13	.16	.24
3/8"	C0-6NP	.13	.16	.24
1/2"	C0-8NP	.13	.16	.24
5/8"	C0-10NP	.14	.18	.26
3/4"	C0-12NP	.27	.34	.49
1"	C0-16NP	.32	.40	.59

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified

Equal Leg Couplers



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/16"	C0-1NN*	.12	.15	.22
3/32"	C0-1.5NN*	.12	.15	.22
1/8"	C0-2NN*	.12	.15	.22
5/32"	C0-2.5NN	.21	.26	.28
3/16"	C0-3NN	.21	.26	.28
1/4"	C0-4NN	.14	.18	.26
5/16"	C0-5NN	.14	.18	.26
3/8"	C0-6NN	.14	.18	.26
1/2"	C0-8NN	.14	.18	.26
5/8"	C0-10NN	.17	.21	.31
3/4"	C0-12NN	.32	.40	.59
1"	C0-16NN	.34	.43	.62

* Part numbers followed by * are not NSF certified



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Polyethylene

Excellent Chemical Resistance

High Density Polyethylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/16"	C0-1HDPE*	.12	.15	.22
3/32"	C0-1.5HDPE*	.12	.15	.22
1/8"	C0-2HDPE*	.12	.15	.22
5/32"	C0-2.5HDPE	.12	.15	.22
3/16"	C0-3HDPE	.12	.15	.22
1/4"	C0-4HDPE	.14	.18	.26
5/16"	C0-5HDPE	.14	.18	.26
3/8"	C0-6HDPE	.14	.18	.26
1/2"	C0-8HDPE	.14	.18	.26
5/8"	C0-10HDPE	.14	.18	.26
3/4"	C0-12HDPE	.24	.30	.44
1"	C0-16HDPE	.32	.40	.59

* Part numbers followed by * are not NSF certified



Certified to
NSF/ANSI 61
NSF/ANSI 51

ISO 9001

Reduction Couplers



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Natural Polypropylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32" • 1/16"	C1.5-1NK*	.23	.29	.42	3/32" • 1/16"	C1.5-1NP	.14	.18	.26
1/8" • 1/16"	C2-1NK*	.23	.29	.42	1/8" • 1/16"	C2-1NP	.14	.18	.26
1/8" • 3/32"	C2-1.5NK*	.23	.29	.42	1/8" • 3/32"	C2-1.5NP	.14	.18	.26
5/32" • 1/8"	C2.5-2NK	.38	.48	.70	5/32" • 1/8"	C2.5-2NP	.22	.28	.40
3/16" • 1/8"	C3-2NK	.40	.50	.73	3/16" • 1/8"	C3-2NP	.23	.29	.42
1/4" • 1/8"	C4-2NK	.42	.53	.77	1/4" • 1/8"	C4-2NP	.23	.29	.42
1/4" • 5/32"	C4-2.5NK	.44	.55	.81	1/4" • 5/32"	C4-2.5NP	.23	.29	.42
1/4" • 3/16"	C4-3NK	.47	.59	.86	1/4" • 3/16"	C4-3NP	.25	.31	.46
5/16" • 1/4"	C5-4NK	.60	.75	1.10	5/16" • 1/4"	C5-4NP	.20	.25	.37
3/8" • 1/4"	C6-4NK	.62	.78	1.13	3/8" • 1/4"	C6-4NP	.13	.16	.24
3/8" • 5/16"	C6-5NK	.64	.80	1.17	3/8" • 5/16"	C6-5NP	.13	.16	.24
1/2" • 1/4"	C8-4NK	.74	.93	1.35	1/2" • 1/4"	C8-4NP	.13	.16	.24
1/2" • 5/16"	C8-5NK	.75	.94	1.37	1/2" • 5/16"	C8-5NP	.13	.16	.24
1/2" • 3/8"	C8-6NK	.77	.96	1.41	1/2" • 3/8"	C8-6NP	.13	.16	.24
5/8" • 1/4"	C10-4NK	.80	1.00	1.46	5/8" • 1/4"	C10-4NP	.14	.18	.26
5/8" • 5/16"	C10-5NK	.83	1.04	1.52	5/8" • 5/16"	C10-5NP	.14	.18	.26
5/8" • 3/8"	C10-6NK	.85	1.06	1.56	5/8" • 3/8"	C10-6NP	.14	.18	.26
5/8" • 1/2"	C10-8NK	.87	1.09	1.59	5/8" • 1/2"	C10-8NP	.14	.18	.26
3/4" • 3/8"	C12-6NK	1.00	1.25	1.83	3/4" • 3/8"	C12-6NP	.14	.18	.26
3/4" • 1/2"	C12-8NK	1.04	1.30	1.90	3/4" • 1/2"	C12-8NP	.14	.18	.26
3/4" • 5/8"	C12-10NK	1.09	1.36	1.99	3/4" • 5/8"	C12-10NP	.27	.34	.49
1" • 1/2"	C16-8NK	1.32	1.65	2.42	1" • 1/2"	C16-8NP	.31	.39	.57
1" • 5/8"	C16-10NK	1.36	1.70	2.49	1" • 5/8"	C16-10NP	.31	.39	.57
1" • 3/4"	C16-12NK	1.44	1.80	2.64	1" • 3/4"	C16-12NP	.31	.39	.57

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified

Reduction Barbed Elbows

ISO 9001



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar


Natural Polypropylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/2" • 3/8"	RL8-6NK	.79	.99	1.45	1/2" • 3/8"	RL8-6NP	.23	.29	.42

Polypropylene fittings are not NSF certified

< Back

< More



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon

Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

High Density Polyethylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32" • 1/16"	C1.5-1NN*	.12	.15	.22	3/32" • 1/16"	C1.5-1HDPE*	.12	.15	.22
1/8" • 1/16"	C2-1NN*	.12	.15	.22	1/8" • 1/16"	C2-1HDPE*	.12	.15	.22
1/8" • 3/32"	C2-1.5NN*	.12	.15	.22	1/8" • 3/32"	C2-1.5HDPE*	.12	.15	.22
5/32" • 1/8"	C2.5-2NN	.19	.24	.35	5/32" • 1/8"	C2.5-2HDPE	.12	.15	.22
3/16" • 1/8"	C3-2NN	.21	.26	.38	3/16" • 1/8"	C3-2HDPE	.12	.15	.22
1/4" • 1/8"	C4-2NN	.21	.26	.38	1/4" • 1/8"	C4-2HDPE	.12	.15	.22
1/4" • 5/32"	C4-2.5NN	.21	.26	.38	1/4" • 5/32"	C4-2.5HDPE	.12	.15	.22
1/4" • 3/16"	C4-3NN	.23	.29	.42	1/4" • 3/16"	C4-3HDPE	.12	.15	.22
5/16" • 1/4"	C5-4NN	.18	.23	.33	5/16" • 1/4"	C5-4HDPE	.13	.16	.24
3/8" • 1/4"	C6-4NN	.14	.18	.26	3/8" • 1/4"	C6-4HDPE	.13	.16	.24
3/8" • 5/16"	C6-5NN	.14	.18	.26	3/8" • 5/16"	C6-5HDPE	.13	.16	.24
1/2" • 1/4"	C8-4NN	.14	.18	.26	1/2" • 1/4"	C8-4HDPE	.13	.16	.24
1/2" • 5/16"	C8-5NN	.14	.18	.26	1/2" • 5/16"	C8-5HDPE	.13	.16	.24
1/2" • 3/8"	C8-6NN	.14	.18	.26	1/2" • 3/8"	C8-6HDPE	.13	.16	.24
5/8" • 1/4"	C10-4NN	.17	.21	.31	5/8" • 1/4"	C10-4HDPE	.14	.18	.26
5/8" • 5/16"	C10-5NN	.17	.21	.31	5/8" • 5/16"	C10-5HDPE	.14	.18	.26
5/8" • 3/8"	C10-6NN	.17	.21	.31	5/8" • 3/8"	C10-6HDPE	.14	.18	.26
5/8" • 1/2"	C10-8NN	.17	.21	.31	5/8" • 1/2"	C10-8HDPE	.14	.18	.26
3/4" • 3/8"	C12-6NN	.17	.21	.31	3/4" • 3/8"	C12-6HDPE	.14	.18	.26
3/4" • 1/2"	C12-8NN	.17	.21	.31	3/4" • 1/2"	C12-8HDPE	.14	.18	.26
3/4" • 5/8"	C12-10NN	.32	.40	.59	3/4" • 5/8"	C12-10HDPE	.27	.34	.49
1" • 1/2"	C16-8NN	.33	.41	.60	1" • 1/2"	C16-8HDPE	.31	.39	.57
1" • 5/8"	C16-10NN	.33	.41	.60	1" • 5/8"	C16-10HDPE	.31	.39	.57
1" • 3/4"	C16-12NN	.33	.41	.60	1" • 3/4"	C16-12HDPE	.31	.39	.57

* Part numbers followed by * are not NSF certified

* Part numbers followed by * are not NSF certified

< Back

< More



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon

Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

High Density Polyethylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/2" • 3/8"	RL8-6NN	.23	.29	.42	1/2" • 3/8"	RL8-6HDPE	.23	.29	.42



Certified to
NSF/ANSI 61
NSF/ANSI 51



Threaded Elbows



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Natural Polypropylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
10-32 UNF • 1/16"	L1032-1NK*	.35	.44	.64	10-32 UNF • 1/16"	L1032-1NP	.25	.31	.46
10-32 Taper • 1/16"	L1032T-1NK*	.35	.44	.64	10-32 Taper • 1/16"	L1032T-1NP	.25	.31	.46
10-32 UNF • 1/8"	L1032-2NK*	.39	.49	.71	10-32 UNF • 1/8"	L1032-2NP	.28	.35	.51
10-32 Taper • 1/8"	L1032T-2NK*	.39	.49	.71	10-32 Taper • 1/8"	L1032T-2NP	.28	.35	.51
1/8" NPT • 1/8"	L2-2NK	.68	.85	1.24	1/8" NPT • 1/8"	L2-2NP	.21	.26	.38
1/8" NPT • 5/32"	L2-2.5NK	.68	.85	1.24	1/8" NPT • 5/32"	L2-2.5NP	.21	.26	.38
1/8" NPT • 1/4"	L2-4NK	.68	.85	1.24	1/8" NPT • 1/4"	L2-4NP	.21	.26	.38
1/8" NPT • 5/16"	L2-5NK	.68	.85	1.24	1/8" NPT • 5/16"	L2-5NP	.21	.26	.38
1/8" NPT • 3/8"	L2-6NK	.69	.86	1.26	1/8" NPT • 3/8"	L2-6NP	.21	.26	.38
1/4" NPT • 1/8"	L4-2NK	.73	.91	1.34	1/4" NPT • 1/8"	L4-2NP	.21	.26	.38
1/4" NPT • 5/32"	L4-2.5NK	.73	.91	1.34	1/4" NPT • 5/32"	L4-2.5NP	.21	.26	.38
1/4" NPT • 3/16"	L4-3NK	.73	.91	1.34	1/4" NPT • 3/16"	L4-3NP	.21	.26	.38
1/4" NPT • 1/4"	L4-4NK	.73	.91	1.34	1/4" NPT • 1/4"	L4-4NP	.21	.26	.38
1/4" NPT • 5/16"	L4-5NK	.73	.91	1.34	1/4" NPT • 5/16"	L4-5NP	.21	.26	.38
1/4" NPT • 3/8"	L4-6NK	.76	.95	1.39	1/4" NPT • 3/8"	L4-6NP	.21	.26	.38
1/4" NPT • 1/2"	L4-8NK	.79	.99	1.45	1/4" NPT • 1/2"	L4-8NP	.21	.26	.38
3/8" NPT • 1/4"	L6-4NK	.83	1.04	1.52	3/8" NPT • 1/4"	L6-4NP	.21	.26	.38
3/8" NPT • 5/16"	L6-5NK	.86	1.08	1.57	3/8" NPT • 5/16"	L6-5NP	.23	.29	.42
3/8" NPT • 3/8"	L6-6NK	.86	1.08	1.57	3/8" NPT • 3/8"	L6-6NP	.23	.29	.42
3/8" NPT • 1/2"	L6-8NK	.91	1.14	1.67	3/8" NPT • 1/2"	L6-8NP	.23	.29	.42
1/2" NPT • 1/4"	L8-4NK	.95	1.19	1.74	1/2" NPT • 1/4"	L8-4NP	.23	.29	.42
1/2" NPT • 3/8"	L8-6NK	.97	1.21	1.78	1/2" NPT • 3/8"	L8-6NP	.23	.29	.42
1/2" NPT • 1/2"	L8-8NK	1.00	1.25	1.83	1/2" NPT • 1/2"	L8-8NP	.23	.29	.42
1/2" NPT • 5/8"	L8-10NK	1.05	1.31	1.92	1/2" NPT • 5/8"	L8-10NP	.25	.31	.46
1/2" NPT • 3/4"	L8-12NK	1.11	1.39	2.03	1/2" NPT • 3/4"	L8-12NP	.27	.34	.49
3/4" NPT • 1/4"	L12-4NK	1.13	1.41	2.07	3/4" NPT • 1/4"	L12-4NP	.25	.31	.46
3/4" NPT • 3/8"	L12-6NK	1.18	1.48	2.16	3/4" NPT • 3/8"	L12-6NP	.31	.39	.57
3/4" NPT • 1/2"	L12-8NK	1.21	1.51	2.21	3/4" NPT • 1/2"	L12-8NP	.31	.39	.57
3/4" NPT • 5/8"	L12-10NK	1.44	1.80	2.64	3/4" NPT • 5/8"	L12-10NP	.32	.40	.59
3/4" NPT • 3/4"	L12-12NK	1.44	1.80	2.64	3/4" NPT • 3/4"	L12-12NP	.32	.40	.59
3/4" NPT • 1"	L12-16NK	1.64	2.05	3.00	3/4" NPT • 1"	L12-16NP	.33	.41	.60
1" NPT • 1"	L16-16NK	1.77	2.21	3.24	1" NPT • 1"	L16-16NP	.37	.46	.68

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified

Clamps should be used with all fittings shown in this catalog.

Never place a clamp over the large diameter of the barb. Clamps work best when tightened into the recess behind the barb. For best results place the clamp behind the barb and over the anti-rotation devices. The anti-rotation devices (Patented) are small oval shaped raised areas and if used properly will inhibit the hose rotation on the barb. Rotation of the hose on the barb is the cause of many of the leaks associated with other hose fitting designs. Please see illustrations on page 7 for proper clamp placement.



Threaded Elbows



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon
Good Tensile Strength



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene
Excellent Chemical Resistance

Natural Nylon



High Density Polyethylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
10-32 UNF • 1/16"	L1032-1NN*	.20	.25	.37	10-32 UNF • 1/16"	L1032-1HDPE*	.20	.25	.37
10-32 Taper • 1/16"	L1032T-1NN*	.20	.25	.37	10-32 Taper • 1/16"	L1032T-1HDPE*	.20	.25	.37
10-32 UNF • 1/8"	L1032-2NN*	.23	.29	.42	10-32 UNF • 1/8"	L1032-2HDPE*	.20	.25	.37
10-32 Taper • 1/8"	L1032T-2NN*	.23	.29	.42	10-32 Taper • 1/8"	L1032T-2HDPE*	.20	.25	.37
1/8" NPT • 1/8"	L2-2NN	.21	.26	.38	1/8" NPT • 1/8"	L2-2HDPE	.21	.26	.38
1/8" NPT • 5/32"	L2-2.5NN	.21	.26	.38	1/8" NPT • 5/32"	L2-2.5HDPE	.21	.26	.38
1/8" NPT • 1/4"	L2-4NN	.21	.26	.38	1/8" NPT • 1/4"	L2-4HDPE	.21	.26	.38
1/8" NPT • 5/16"	L2-5NN	.21	.26	.38	1/8" NPT • 5/16"	L2-5HDPE	.21	.26	.38
1/8" NPT • 3/8"	L2-6NN	.21	.26	.38	1/8" NPT • 3/8"	L2-6HDPE	.21	.26	.38
1/4" NPT • 1/8"	L4-2NN	.21	.26	.38	1/4" NPT • 1/8"	L4-2HDPE	.21	.26	.38
1/4" NPT • 5/32"	L4-2.5NN	.21	.26	.38	1/4" NPT • 5/32"	L4-2.5HDPE	.21	.26	.38
1/4" NPT • 3/16"	L4-3NN	.21	.26	.38	1/4" NPT • 3/16"	L4-3HDPE	.21	.26	.38
1/4" NPT • 1/4"	L4-4NN	.21	.26	.38	1/4" NPT • 1/4"	L4-4HDPE	.21	.26	.38
1/4" NPT • 5/16"	L4-5NN	.21	.26	.38	1/4" NPT • 5/16"	L4-5HDPE	.21	.26	.38
1/4" NPT • 3/8"	L4-6NN	.21	.26	.38	1/4" NPT • 3/8"	L4-6HDPE	.21	.26	.38
1/4" NPT • 1/2"	L4-8NN	.21	.26	.38	1/4" NPT • 1/2"	L4-8HDPE	.21	.26	.38
3/8" NPT • 1/4"	L6-4NN	.21	.26	.38	3/8" NPT • 1/4"	L6-4HDPE	.21	.26	.38
3/8" NPT • 5/16"	L6-5NN	.23	.29	.42	3/8" NPT • 5/16"	L6-5HDPE	.23	.29	.42
3/8" NPT • 3/8"	L6-6NN	.23	.29	.42	3/8" NPT • 3/8"	L6-6HDPE	.23	.29	.42
3/8" NPT • 1/2"	L6-8NN	.23	.29	.42	3/8" NPT • 1/2"	L6-8HDPE	.23	.29	.42
1/2" NPT • 1/4"	L8-4NN	.23	.29	.42	1/2" NPT • 1/4"	L8-4HDPE	.23	.29	.42
1/2" NPT • 3/8"	L8-6NN	.23	.29	.42	1/2" NPT • 3/8"	L8-6HDPE	.23	.29	.42
1/2" NPT • 1/2"	L8-8NN	.23	.29	.42	1/2" NPT • 1/2"	L8-8HDPE	.23	.29	.42
1/2" NPT • 5/8"	L8-10NN	.27	.34	.49	1/2" NPT • 5/8"	L8-10HDPE	.26	.33	.48
1/2" NPT • 3/4"	L8-12NN	.31	.39	.57	1/2" NPT • 3/4"	L8-12HDPE	.27	.34	.49
3/4" NPT • 1/4"	L12-4NN	.25	.31	.46	3/4" NPT • 1/4"	L12-4HDPE	.25	.31	.46
3/4" NPT • 3/8"	L12-6NN	.32	.40	.59	3/4" NPT • 3/8"	L12-6HDPE	.31	.39	.57
3/4" NPT • 1/2"	L12-8NN	.32	.40	.59	3/4" NPT • 1/2"	L12-8HDPE	.31	.39	.57
3/4" NPT • 5/8"	L12-10NN	.33	.41	.60	3/4" NPT • 5/8"	L12-10HDPE	.32	.40	.59
3/4" NPT • 3/4"	L12-12NN	.33	.41	.60	3/4" NPT • 3/4"	L12-12HDPE	.32	.40	.59
3/4" NPT • 1"	L12-16NN	.34	.43	.62	3/4" NPT • 1"	L12-16HDPE	.33	.41	.60
1" NPT • 1"	L16-16NN	.38	.48	.70	1" NPT • 1"	L16-16HDPE	.37	.46	.68

* Part numbers followed by * are not NSF certified

* Part numbers followed by * are not NSF certified

PROPER CLAMP PLACEMENT FOR BARBED FITTINGS

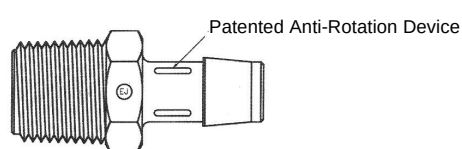



Threaded Elbows

British Standard Pipe Thread



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Natural Kynar Ultimate Chemical Resistance

Natural Polypropylene

Natural Polypropylene Good Chemical Resistance

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"BSPT • 1/8"	L2B-2NK	.68	.85	1.24	1/8" BSPT • 1/8"	L2B-2NP	.21	.26	.38
1/8" BSPT • 5/32"	L2B-2.5NK	.68	.85	1.24	1/8" BSPT • 5/32"	L2B-2.5NP	.21	.26	.38
1/8" BSPT • 1/4"	L2B-4NK	.68	.85	1.24	1/8" BSPT • 1/4"	L2B-4NP	.21	.26	.38
1/8" BSPT • 5/16"	L2B-5NK	.68	.85	1.24	1/8" BSPT • 5/16"	L2B-5NP	.21	.26	.38
1/8" BSPT • 3/8"	L2B-6NK	.69	.86	1.26	1/8" BSPT • 3/8"	L2B-6NP	.21	.26	.38
1/4" BSPT • 1/8"	L4B-2NK	.73	.91	1.34	1/4" BSPT • 1/8"	L4B-2NP	.21	.26	.38
1/4" BSPT • 5/32"	L4B-2.5NK	.73	.91	1.34	1/4" BSPT • 5/32"	L4B-2.5NP	.21	.26	.38
1/4" BSPT • 3/16"	L4B-3NK	.73	.91	1.34	1/4" BSPT • 3/16"	L4B-3NP	.21	.26	.38
1/4" BSPT • 1/4"	L4B-4NK	.73	.91	1.34	1/4" BSPT • 1/4"	L4B-4NP	.21	.26	.38
1/4" BSPT • 5/16"	L4B-5NK	.73	.91	1.34	1/4" BSPT • 5/16"	L4B-5NP	.21	.26	.38
1/4" BSPT • 3/8"	L4B-6NK	.76	.95	1.39	1/4" BSPT • 3/8"	L4B-6NP	.21	.26	.38
1/4" BSPT • 1/2"	L4B-8NK	.79	.95	1.39	1/4" BSPT • 1/2"	L4B-8NP	.21	.26	.38
3/8" BSPT • 1/4"	L6B-4NK	.83	1.04	1.52	3/8" BSPT • 1/4"	L6B-4NP	.21	.26	.38
3/8" BSPT • 5/16"	L6B-5NK	.86	1.08	1.57	3/8" BSPT • 5/16"	L6B-5NP	.23	.29	.42
3/8" BSPT • 3/8"	L6B-6NK	.86	1.08	1.57	3/8" BSPT • 3/8"	L6B-6P	.23	.29	.42
3/8" BSPT • 1/2"	L6B-8NK	.91	1.14	1.67	3/8" BSPT • 1/2"	L6B-8NP	.23	.29	.42

Polypropylene fittings are not NSF certified



British Standard Pipe Thread

Natural Nylon
Good Tensile Strength

High Density Natural Polyethylene

Excellent Chemical Resistance
High Density Polyethylene



Certified to
NSF/ANSI 61
NSF/ANSI 51

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"BSPT • 1/8"	L2B-2NN	.21	.26	.38	1/8" BSPT • 1/8"	L2B-2HDPE	.21	.26	.38
1/8" BSPT • 5/32"	L2B-2.5NN	.21	.26	.38	1/8" BSPT • 5/32"	L2B-2.5HDPE	.21	.26	.38
1/8" BSPT • 1/4"	L2B-4NN	.21	.26	.38	1/8" BSPT • 1/4"	L2B-4HDPE	.21	.26	.38
1/8" BSPT • 5/16"	L2B-5NN	.21	.26	.38	1/8" BSPT • 5/16"	L2B-5HDPE	.21	.26	.38
1/8" BSPT • 3/8"	L2B-6NN	.21	.26	.38	1/8" BSPT • 3/8"	L2B-6HDPE	.21	.26	.38
1/4" BSPT • 1/8"	L4B-2NN	.21	.26	.38	1/4" BSPT • 1/8"	L4B-2HDPE	.21	.26	.38
1/4" BSPT • 5/32"	L4B-2.5NN	.21	.26	.38	1/4" BSPT • 5/32"	L4B-2.5HDPE	.21	.26	.38
1/4" BSPT • 3/16"	L4B-3NN	.21	.26	.38	1/4" BSPT • 3/16"	L4B-3HDPE	.21	.26	.38
1/4" BSPT • 1/4"	L4B-4NN	.21	.26	.38	1/4" BSPT • 1/4"	L4B-4HDPE	.21	.26	.38
1/4" BSPT • 5/16"	L4B-5NN	.21	.26	.38	1/4" BSPT • 5/16"	L4B-5HDPE	.21	.26	.38
1/4" BSPT • 3/8"	L4B-6NN	.21	.26	.38	1/4" BSPT • 3/8"	L4B-6HDPE	.21	.26	.38
1/4" BSPT • 1/2"	L4B-8NN	.21	.26	.38	1/4" BSPT • 1/2"	L4B-8HDPE	.21	.26	.38
3/8" BSPT • 1/4"	L6B-4NN	.21	.26	.38	3/8" BSPT • 1/4"	L6B-4HDPE	.21	.26	.38
3/8" BSPT • 3/8"	L6B-6NN	.23	.29	.42	3/8" BSPT • 3/8"	L6B-6HDPE	.23	.29	.42
3/8" BSPT • 5/16"	L6B-5NN	.23	.29	.42	3/8" BSPT • 5/16"	L6B-5HDPE	.23	.29	.42
3/8" BSPT • 1/2"	L6B-8NN	.23	.29	.42	3/8" BSPT • 1/2"	L6B-8HDPE	.23	.29	.42



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)
Ultimate Chemical Resistance

Natural Kynar

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	L0-1.5NK*	.36	.45	.66	3/32"	L0-1.5NP	.25	.31	.46
1/8"	L0-2NK*	.39	.49	.71	1/8"	L0-2NP	.27	.34	.49
5/32"	L0-2.5NK	.65	.81	1.19	5/32"	L0-2.5NP	.34	.43	.62
3/16"	L0-3NK	.77	.96	1.41	3/16"	L0-3NP	.39	.49	.71
1/4"	L0-4NK	.68	.85	1.24	1/4"	L0-4NP	.20	.25	.37
5/16"	L0-5NK	.73	.91	1.34	5/16"	L0-5NP	.21	.26	.38
3/8"	L0-6NK	.73	.91	1.34	3/8"	L0-6NP	.21	.26	.38
1/2"	L0-8NK	.79	.99	1.45	1/2"	L0-8NP	.21	.26	.38
5/8"	L0-10NK	1.04	1.30	1.90	5/8"	L0-10NP	.25	.31	.46
3/4"	L0-12NK	1.32	1.65	2.42	3/4"	L0-12NP	.27	.34	.49
1"	L0-16NK	1.65	2.06	3.02	1"	L0-16NP	.36	.45	.66

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified



Natural Polypropylene
Good Chemical Resistance

Natural Polypropylene

Equal Barbed Elbows



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon
Good Tensile Strength

Natural Nylon

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	L0-1.5NN*	.20	.25	.37	3/32"	L0-1.5HDPE*	.20	.25	.37
1/8"	L0-2NN*	.22	.28	.40	1/8"	L0-2HDPE*	.20	.25	.37
5/32"	L0-2.5NN	.29	.36	.53	5/32"	L0-2.5HDPE	.20	.25	.37
3/16"	L0-3NN	.34	.43	.62	3/16"	L0-3HDPE	.20	.25	.37
1/4"	L0-4NN	.20	.25	.27	1/4"	L0-4HDPE	.20	.25	.37
5/16"	L0-5NN	.21	.26	.38	5/16"	L0-5HDPE	.21	.26	.38
3/8"	L0-6NN	.21	.26	.38	3/8"	L0-6HDPE	.21	.26	.38
1/2"	L0-8NN	.21	.26	.38	1/2"	L0-8HDPE	.21	.26	.38
5/8"	L0-10NN	.25	.31	.46	5/8"	L0-10HDPE	.25	.31	.46
3/4"	L0-12NN	.31	.39	.57	3/4"	L0-12HDPE	.27	.34	.49
1"	L0-16NN	.37	.46	.68	1"	L0-16HDPE	.36	.45	.66

* Part numbers followed by * are not NSF certified

* Part numbers followed by * are not NSF certified



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene
Excellent Chemical Resistance

High Density Polyethylene



Certified to
NSF/ANSI 61
NSF/ANSI 51

Thread to Barb Adapters



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Natural Polypropylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
10-32 UNF • 1/16"	A1032-1NK*	.21	.26	.38	10-32 UNF • 1/16"	A1032-1NP	.12	.15	.22
10-32 UNF • 3/32"	A1032-1.5NK*	.22	.28	.40	10-32 UNF • 3/32"	A1032-1.5NP	.12	.15	.22
10-32 UNF • 1/8"	A1032-2NK*	.23	.29	.42	10-32 UNF • 1/8"	A1032-2NP	.12	.15	.22
10-32 Taper • 1/16"	A1032T-1NK*	.21	.26	.38	10-32 Taper • 1/16"	A1032T-1NP	.12	.15	.22
10-32 Taper • 3/32"	A1032T-1.5NK*	.22	.28	.40	10-32 Taper • 3/32"	A1032T-1.5NP	.12	.15	.22
10-32 Taper • 1/8"	A1032T-2NK*	.23	.29	.42	10-32 Taper • 1/8"	A1032T-2NP	.12	.15	.22
1/8" NPT • 1/8"	A2-2NK	.36	.45	.66	1/8" NPT • 1/8"	A2-2NP	.13	.16	.24
1/8" NPT • 5/32"	A2-2.5NK	.45	.56	.82	1/8" NPT • 5/32"	A2-2.5NP	.13	.16	.24
1/8" NPT • 1/4"	A2-4NK	.55	.69	1.01	1/8" NPT • 1/4"	A2-4NP	.13	.16	.24
1/8" NPT • 5/16"	A2-5NK	.55	.69	1.01	1/8" NPT • 5/16"	A2-5NP	.13	.16	.24
1/8" NPT • 3/8"	A2-6NK	.66	.83	1.21	1/8" NPT • 3/8"	A2-6NP	.13	.16	.24
1/4" NPT • 1/8"	A4-2NK	.68	.85	1.24	1/4" NPT • 1/8"	A4-2NP	.13	.16	.24
1/4" NPT • 5/32"	A4-2.5NK	.68	.85	1.24	1/4" NPT • 5/32"	A4-2.5NP	.13	.16	.24
1/4" NPT • 3/16"	A4-3NK	.68	.85	1.24	1/4" NPT • 3/16"	A4-3NP	.13	.16	.24
1/4" NPT • 1/4"	A4-4NK	.68	.85	1.24	1/4" NPT • 1/4"	A4-4NP	.13	.16	.24
1/4" NPT • 5/16"	A4-5NK	.73	.91	1.34	1/4" NPT • 5/16"	A4-5NP	.14	.18	.26
1/4" NPT • 3/8"	A4-6NK	.73	.91	1.34	1/4" NPT • 3/8"	A4-6NP	.14	.18	.26
1/4" NPT • 1/2"	A4-8NK	.76	.95	1.39	1/4" NPT • 1/2"	A4-8NP	.14	.18	.26
3/8" NPT • 1/4"	A6-4NK	.79	.99	1.45	3/8" NPT • 1/4"	A6-4NP	.14	.18	.26
3/8" NPT • 5/16"	A6-5NK	.81	1.01	1.48	3/8" NPT • 5/16"	A6-5NP	.14	.18	.26
3/8" NPT • 3/8"	A6-6NK	.83	1.04	1.52	3/8" NPT • 3/8"	A6-6NP	.14	.18	.26
3/8" NPT • 1/2"	A6-8NK	.87	1.09	1.59	3/8" NPT • 1/2"	A6-8NP	.14	.18	.26
1/2" NPT • 1/4"	A8-4NK	.89	1.11	1.63	1/2" NPT • 1/4"	A8-4NP	.17	.21	.31
1/2" NPT • 3/8"	A8-6NK	.93	1.16	1.70	1/2" NPT • 3/8"	A8-6NP	.17	.21	.31
1/2" NPT • 1/2"	A8-8NK	.97	1.21	1.78	1/2" NPT • 1/2"	A8-8NP	.17	.21	.31
1/2" NPT • 5/8"	A8-10NK	1.02	1.28	1.87	1/2" NPT • 5/8"	A8-10NP	.17	.21	.31
1/2" NPT • 3/4"	A8-12NK	1.06	1.33	1.94	1/2" NPT • 3/4"	A8-12NP	.17	.21	.31
3/4" NPT • 1/4"	A12-4NK	1.09	1.36	1.99	3/4" NPT • 1/4"	A12-4NP	.19	.24	.35
3/4" NPT • 3/8"	A12-6NK	1.14	1.43	2.09	3/4" NPT • 3/8"	A12-6NP	.19	.24	.35
3/4" NPT • 1/2"	A12-8NK	1.16	1.45	2.12	3/4" NPT • 1/2"	A12-8NP	.19	.24	.35
3/4" NPT • 5/8"	A12-10NK	1.24	1.55	2.27	3/4" NPT • 5/8"	A12-10NP	.20	.25	.37
3/4" NPT • 3/4"	A12-12NK	1.33	1.66	2.43	3/4" NPT • 3/4"	A12-12NP	.20	.25	.37
3/4" NPT • 1"	A12-16NK	1.39	1.74	2.54	3/4" NPT • 1"	A12-16NP	.32	.40	.59
1" NPT • 1"	A16-16NK	1.53	1.91	2.80	1" NPT • 1"	A16-16NP	.33	.41	.60

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance


High Density Polyethylene



Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
10-32 UNF • 1/16"	A1032-1NN*	.10	.13	.18	10-32 UNF • 1/16"	A1032-1HPDE*	.10	.13	.18
10-32 UNF • 3/32"	A1032-1.5NN*	.10	.13	.18	10-32 UNF • 3/32"	A1032-1.5HDPE*	.10	.13	.18
10-32 UNF • 1/8"	A1032-2NN*	.10	.13	.18	10-32 UNF • 1/8"	A1032-2HDPE*	.10	.13	.18
10-32 Taper • 1/16"	A1032T-1NN*	.10	.13	.18	10-32 Taper • 1/16"	A1032T-1HDPE*	.10	.13	.18
10-32 Taper • 3/32"	A1032T-1.5NN*	.10	.13	.18	10-32 Taper • 3/32"	A1032T-1.5HDPE*	.10	.13	.18
10-32 Taper • 1/8"	A1032T-2NN*	.10	.13	.18	10-32 Taper • 1/8"	A1032T-2HDPE*	.10	.13	.18
1/8" NPT • 1/8"	A2-2NN	.14	.18	.26	1/8" NPT • 1/8"	A2-2HDPE	.13	.16	.24
1/8" NPT • 5/32"	A2-2.5NN	.14	.18	.26	1/8" NPT • 5/32"	A2-2.5HDPE	.13	.16	.24
1/8" NPT • 1/4"	A2-4NN	.14	.18	.26	1/8" NPT • 1/4"	A2-4HDPE	.13	.16	.24
1/8" NPT • 5/16"	A2-5NN	.14	.18	.26	1/8" NPT • 5/16"	A2-5HDPE	.13	.16	.24
1/8" NPT • 3/8"	A2-6NN	.14	.18	.26	1/8" NPT • 3/8"	A2-6HDPE	.13	.16	.24
1/4" NPT • 1/8"	A4-2NN	.14	.18	.26	1/4" NPT • 1/8"	A4-2HDPE	.13	.16	.24
1/4" NPT • 5/32"	A4-2.5NN	.14	.18	.26	1/4" NPT • 5/32"	A4-2.5HDPE	.13	.16	.24
1/4" NPT • 3/16"	A4-3NN	.14	.18	.26	1/4" NPT • 3/16"	A4-3HDPE	.13	.16	.24
1/4" NPT • 1/4"	A4-4NN	.14	.18	.26	1/4" NPT • 1/4"	A4-4HDPE	.13	.16	.24
1/4" NPT • 5/16"	A4-5NN	.17	.21	.31	1/4" NPT • 5/16"	A4-5HDPE	.14	.18	.26
1/4" NPT • 3/8"	A4-6NN	.17	.21	.31	1/4" NPT • 3/8"	A4-6HDPE	.14	.18	.26
1/4" NPT • 1/2"	A4-8NN	.17	.21	.31	1/4" NPT • 1/2"	A4-8HDPE	.14	.18	.26
3/8" NPT • 1/4"	A6-4NN	.17	.21	.31	3/8" NPT • 1/4"	A6-4HDPE	.14	.18	.26
3/8" NPT • 5/16"	A6-5NN	.17	.21	.31	3/8" NPT • 5/16"	A6-5HDPE	.14	.18	.26
3/8" NPT • 3/8"	A6-6NN	.17	.21	.31	3/8" NPT • 3/8"	A6-6HDPE	.14	.18	.26
3/8" NPT • 1/2"	A6-8NN	.17	.21	.31	3/8" NPT • 1/2"	A6-8HDPE	.14	.18	.26
1/2" NPT • 1/4"	A8-4NN	.18	.23	.33	1/2" NPT • 1/4"	A8-4HDPE	.17	.21	.31
1/2" NPT • 3/8"	A8-6NN	.18	.23	.33	1/2" NPT • 3/8"	A8-6HDPE	.17	.21	.31
1/2" NPT • 1/2"	A8-8NN	.18	.23	.33	1/2" NPT • 1/2"	A8-8HDPE	.17	.21	.31
1/2" NPT • 5/8"	A8-10NN	.18	.23	.33	1/2" NPT • 5/8"	A8-10HDPE	.17	.21	.31
1/2" NPT • 3/4"	A8-12NN	.18	.23	.33	1/2" NPT • 3/4"	A8-12HDPE	.17	.21	.31
3/4" NPT • 1/4"	A12-4NN	.19	.24	.35	3/4" NPT • 1/4"	A12-4HDPE	.19	.24	.35
3/4" NPT • 3/8"	A12-6NN	.19	.24	.35	3/4" NPT • 3/8"	A12-6HDPE	.19	.24	.35
3/4" NPT • 1/2"	A12-8NN	.19	.24	.35	3/4" NPT • 1/2"	A12-8HDPE	.19	.24	.35
3/4" NPT • 5/8"	A12-10NN	.21	.26	.38	3/4" NPT • 5/8"	A12-10HDPE	.20	.25	.37
3/4" NPT • 3/4"	A12-12NN	.21	.26	.38	3/4" NPT • 3/4"	A12-12HDPE	.20	.25	.37
3/4" NPT • 1"	A12-16NN	.34	.43	.62	3/4" NPT • 1"	A12-16HDPE	.32	.40	.59
1" NPT • 1"	A16-16NN	.36	.45	.66	1" NPT • 1"	A16-16HDPE	.33	.41	.60

* Part numbers followed by * are not NSF certified

* Part numbers followed by * are not NSF certified

Certified to
NSF/ANSI 61
NSF/ANSI 51

Thread to Barb Adapters

British Standard Pipe Thread

ISO 9001

Natural Kynar (PVDF)Natural Kynar Ultimate Chemical Resistance**Natural Polypropylene**Natural Polypropylene Good Chemical Resistance

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"BSPT • 1/8"	A2B-2NK	.36	.45	.66	1/8" BSPT • 1/8"	A2B-2NP	.13	.16	.24
1/8" BSPT • 5/32"	A2B-2.5NK	.36	.45	.66	1/8" BSPT • 5/32"	A2B-2.5NP	.13	.16	.24
1/8" BSPT • 1/4"	A2B-4NK	.55	.69	1.01	1/8" BSPT • 1/4"	A2B-4NP	.13	.16	.24
1/8" BSPT • 3/8"	A2B-6NK	.66	.83	1.21	1/8" BSPT • 3/8"	A2B-6NP	.13	.16	.24
1/4" BSPT • 1/8"	A4B-2NK	.68	.85	1.24	1/4" BSPT • 1/8"	A4B-2NP	.13	.16	.24
1/4" BSPT • 5/32"	A4B-2.5NK	.68	.85	1.24	1/4" BSPT • 5/32"	A4B-2.5NP	.13	.16	.24
1/4" BSPT • 3/16"	A4B-3NK	.68	.85	1.24	1/4" BSPT • 3/16"	A4B-3NP	.13	.16	.24
1/4" BSPT • 1/4"	A4B-4NK	.68	.85	1.24	1/4" BSPT • 1/4"	A4B-4NP	.13	.16	.24
1/4" BSPT • 5/16"	A4B-5NK	.73	.91	1.34	1/4" BSPT • 5/16"	A4B-5NP	.14	.18	.26
1/4" BSPT • 3/8"	A4B-6NK	.73	.91	1.34	1/4" BSPT • 3/8"	A4B-6NP	.14	.18	.26
1/4" BSPT • 1/2"	A4B-8NK	.76	.95	1.39	1/4" BSPT • 1/2"	A4B-8NP	.14	.18	.26
3/8" BSPT • 1/4"	A6B-4NK	.79	.99	1.45	3/8" BSPT • 1/4"	A6B-4NP	.14	.18	.26
3/8" BSPT • 5/16"	A6B-5NK	.81	1.01	1.48	3/8" BSPT • 5/16"	A6B-5NP	.14	.18	.26
3/8" BSPT • 3/8"	A6B-6NK	.83	1.04	1.52	3/8" BSPT • 3/8"	A6B-6NP	.14	.18	.26
3/8" BSPT • 1/2"	A6B-8NK	.87	1.09	1.59	3/8" BSPT • 1/2"	A6B-8NP	.14	.18	.26

Polypropylene fittings are not NSF certified

British Standard Pipe ThreadCertified to
NSF/ANSI 61
NSF/ANSI 51**Natural Nylon**

Good Tensile Strength

Natural NylonCertified to
NSF/ANSI 61
NSF/ANSI 51**High Density Natural Polyethylene**

Excellent Chemical Resistance

High Density Polyethylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"BSPT • 1/8"	A2B-2NN	.14	.18	.26	1/8" BSPT • 1/8"	A2B-2HDPE	.13	.16	.24
1/8" BSPT • 5/32"	A2B-2.5NN	.14	.18	.26	1/8" BSPT • 5/32"	A2B-2.5HDPE	.13	.16	.24
1/8" BSPT • 1/4"	A2B-4NN	.14	.18	.26	1/8" BSPT • 1/4"	A2B-4HDPE	.13	.16	.24
1/8" BSPT • 3/8"	A2B-6NN	.14	.18	.26	1/8" BSPT • 3/8"	A2B-6HDPE	.13	.16	.24
1/4" BSPT • 1/8"	A4B-2NN	.14	.18	.26	1/4" BSPT • 1/8"	A4B-2HDPE	.13	.16	.24
1/4" BSPT • 5/32"	A4B-2.5NN	.14	.18	.26	1/4" BSPT • 5/32"	A4B-2.5HDPE	.13	.16	.24
1/4" BSPT • 3/16"	A4B-3NN	.14	.18	.26	1/4" BSPT • 3/16"	A4B-3HDPE	.13	.16	.24
1/4" BSPT • 1/4"	A4B-4NN	.14	.18	.26	1/4" BSPT • 1/4"	A4B-4HDPE	.13	.16	.24
1/4" BSPT • 5/16"	A4B-5NN	.17	.21	.31	1/4" BSPT • 5/16"	A4B-5HDPE	.14	.18	.26
1/4" BSPT • 3/8"	A4B-6NN	.17	.21	.31	1/4" BSPT • 3/8"	A4B-6HDPE	.14	.18	.26
1/4" BSPT • 1/2"	A4B-8NN	.17	.21	.31	1/4" BSPT • 1/2"	A4B-8HDPE	.14	.18	.26
3/8" BSPT • 1/4"	A6B-4NN	.17	.21	.31	3/8" BSPT • 1/4"	A6B-4HDPE	.14	.18	.26
3/8" BSPT • 5/16"	A6B-5NN	.17	.21	.31	3/8" BSPT • 5/16"	A6B-5HDPE	.14	.18	.26
3/8" BSPT • 3/8"	A6B-6NN	.17	.21	.31	3/8" BSPT • 3/8"	A6B-6HDPE	.14	.18	.26
3/8" BSPT • 1/2"	A6B-8NN	.17	.21	.31	3/8" BSPT • 1/2"	A6B-8HDPE	.14	.18	.26



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)
Ultimate Chemical Resistance

Equal Barbed Tees

ISO 9001

Natural Polypropylene
Good Chemical Resistance

Natural Kynar

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	T0-1.5NK*	.43	.54	.79
1/8"	T0-2NK*	.46	.58	.84
5/32"	T0-2.5NK	.65	.81	1.19
3/16"	T0-3NK	.77	.96	1.40
1/4"	T0-4NK	.69	.86	1.26
5/16"	T0-5NK	.79	.99	1.45
3/8"	T0-6NK	.79	.99	1.45
1/2"	T0-8NK	.89	1.11	1.63
5/8"	T0-10NK	1.16	1.45	2.12
3/4"	T0-12NK	1.46	1.83	2.67
1"	T0-16NK	1.88	2.35	3.44

Natural Polypropylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	T0-1.5NP	.25	.31	.46
1/8"	T0-2NP	.27	.34	.49
5/32"	T0-2.5NP	.34	.43	.62
3/16"	T0-3NP	.39	.49	.71
1/4"	T0-4NP	.21	.26	.38
5/16"	T0-5NP	.21	.26	.38
3/8"	T0-6NP	.21	.26	.38
1/2"	T0-8NP	.23	.29	.42
5/8"	T0-10NP	.25	.31	.46
3/4"	T0-12NP	.26	.33	.48
1"	T0-16NP	.32	.40	.59

* Part numbers followed by * are not NSF certified

Polypropylene fittings are not NSF certified

ISO 9001



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon
Good Tensile Strength

Equal Barbed Tees



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene
Excellent Chemical Resistance

Natural Nylon

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	T0-1.5NN*	.20	.25	.37
1/8"	T0-2NN*	.22	.28	.40
5/32"	T0-2.5NN	.29	.36	.53
3/16"	T0-3NN	.34	.43	.62
1/4"	T0-4NN	.21	.26	.38
5/16"	T0-5NN	.21	.26	.38
3/8"	T0-6NN	.21	.26	.38
1/2"	T0-8NN	.23	.29	.42
5/8"	T0-10NN	.25	.31	.46
3/4"	T0-12NN	.27	.34	.49
1"	T0-16NN	.33	.41	.60

High Density Polyethylene

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
3/32"	T0-1.5HDPE*	.20	.25	.37
1/8"	T0-2HDPE*	.20	.25	.37
5/32"	T0-2.5HDPE	.20	.25	.37
3/16"	T0-3HDPE	.20	.25	.37
1/4"	T0-4HDPE	.21	.26	.38
5/16"	T0-5HDPE	.21	.26	.38
3/8"	T0-6HDPE	.21	.26	.38
1/2"	T0-8HDPE	.23	.29	.42
5/8"	T0-10HDPE	.25	.31	.46
3/4"	T0-12HDPE	.26	.33	.48
1"	T0-16HDPE	.32	.40	.59

* Part numbers followed by * are not NSF certified

* Part numbers followed by * are not NSF certified

[< Back](#)ORDER
ONLINE[More >](#)Certified to
NSF/ANSI 61
NSF/ANSI 51

ISO 9001

Thread to Barb Tees



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

[Natural Kynar](#)[Natural Polypropylene](#)

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" NPT • 5/32"	T2-2.5NK	.74	.93	1.35	1/8" NPT • 5/32"	T2-2.5NP	.21	.26	.38
1/8" NPT • 1/4"	T2-4NK	.76	.95	1.39	1/8" NPT • 1/4"	T2-4NP	.21	.26	.38
1/8" NPT • 3/8"	T2-6NK	.79	.99	1.45	1/8" NPT • 3/8"	T2-6NP	.21	.26	.38
1/4" NPT • 5/32"	T4-2.5NK	.82	1.03	1.50	1/4" NPT • 5/32"	T4-2.5NP	.21	.26	.38
1/4" NPT • 3/16"	T4-3NK	.82	1.03	1.50	1/4" NPT • 3/16"	T4-3NP	.21	.26	.38
1/4" NPT • 1/4"	T4-4NK	.84	1.05	1.54	1/4" NPT • 1/4"	T4-4NP	.21	.26	.38
1/4" NPT • 5/16"	T4-5NK	.86	1.08	1.57	1/4" NPT • 5/16"	T4-5NP	.21	.26	.38
1/4" NPT • 3/8"	T4-6NK	.88	1.10	1.61	1/4" NPT • 3/8"	T4-6NP	.21	.26	.38
1/4" NPT • 1/2"	T4-8NK	.93	1.16	1.70	1/4" NPT • 1/2"	T4-8NP	.23	.29	.42
3/8" NPT • 1/4"	T6-4NK	.96	1.20	1.76	3/8" NPT • 1/4"	T6-4NP	.23	.29	.42
3/8" NPT • 5/16"	T6-5NK	.99	1.24	1.81	3/8" NPT • 5/16"	T6-5NP	.23	.29	.42
3/8" NPT • 3/8"	T6-6NK	1.00	1.25	1.83	3/8" NPT • 3/8"	T6-6NP	.23	.29	.42
3/8" NPT • 1/2"	T6-8NK	1.03	1.29	1.88	3/8" NPT • 1/2"	T6-8NP	.24	.30	.44
1/2" NPT • 1/4"	T8-4NK	1.07	1.34	1.96	1/2" NPT • 1/4"	T8-4NP	.25	.31	.46
1/2" NPT • 3/8"	T8-6NK	1.09	1.36	1.99	1/2" NPT • 3/8"	T8-6NP	.25	.31	.46
1/2" NPT • 1/2"	T8-8NK	1.13	1.41	2.07	1/2" NPT • 1/2"	T8-8NP	.25	.31	.46
1/2" NPT • 3/4"	T8-12NK	1.22	1.53	2.23	1/2" NPT • 3/4"	T8-12NP	.31	.39	.48
3/4" NPT • 1/4"	T12-4NK	1.24	1.55	2.27	3/4" NPT • 1/4"	T12-4NP	.31	.39	.48
3/4" NPT • 3/8"	T12-6NK	1.29	1.61	2.36	3/4" NPT • 3/8"	T12-6NP	.31	.39	.57
3/4" NPT • 1/2"	T12-8NK	1.34	1.68	2.45	3/4" NPT • 1/2"	T12-8NP	.31	.39	.57
3/4" NPT • 3/4"	T12-12NK	1.55	1.94	2.84	3/4" NPT • 3/4"	T12-12NP	.31	.39	.57
3/4" NPT • 1"	T12-16NK	1.89	2.36	3.46	3/4" NPT • 1"	T12-16NP	.37	.46	.68
1" NPT • 1"	T16-16NK	2.02	2.53	3.70	1" NPT • 1"	T16-16NP	.37	.46	.68

Polypropylene fittings are not NSF certified

[< Back](#)[More >](#)Certified to
NSF/ANSI 61
NSF/ANSI 51

ISO 9001

Reduction Barbed Tees

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

[Natural Kynar](#)[Natural Polypropylene](#)

Body(2)-Leg	Part Number	500+ / piece	100+ / piece	10-100 / piece	Body(2)-Leg	Part Number	500+ / piece	100+ / piece	10-100 / piece
5/32" • 3/8"	RT2.5-6NK	.69	.86	1.26	5/32" • 3/8"	RT2.5-6NP	.23	.29	.42
1/2" • 3/8"	RT8-6NK	.89	1.11	1.63	1/2" • 3/8"	RT8-6NP	.23	.29	.42
5/8" • 3/8"	RT10-6NK	1.16	1.45	2.12	5/8" • 3/8"	RT10-6NP	.25	.31	.46
3/4" • 3/8"	RT12-6NK	1.46	1.83	2.67	3/4" • 3/8"	RT12-6NP	.26	.33	.48
3/4" • 1/2"	RT12-8NK	1.46	1.83	2.67	3/4" • 1/2"	RT12-8NP	.26	.33	.48

Polypropylene fittings are not NSF certified

[< Back](#)ORDER
ONLINE[< More](#)

Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

[Natural Nylon](#)

Thread to Barb Tees



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

[High Density Polyethylene](#)

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" NPT • 5/32"	T2-2.5NN	.21	.26	.38	1/8" NPT • 5/32"	T2-2.5HDPE	.21	.26	.38
1/8" NPT • 1/4"	T2-4NN	.21	.26	.38	1/8" NPT • 1/4"	T2-4HDPE	.21	.26	.38
1/8" NPT • 3/8"	T2-6NN	.21	.26	.38	1/8" NPT • 3/8"	T2-6HDPE	.21	.26	.38
1/4" NPT • 5/32"	T4-2.5NN	.21	.26	.38	1/4" NPT • 5/32"	T4-2.5HDPE	.21	.26	.38
1/4" NPT • 3/16"	T4-3NN	.21	.26	.38	1/4" NPT • 3/16"	T4-3HDPE	.21	.26	.38
1/4" NPT • 1/4"	T4-4NN	.21	.26	.38	1/4" NPT • 1/4"	T4-4HDPE	.21	.26	.38
1/4" NPT • 5/16"	T4-5NN	.21	.26	.38	1/4" NPT • 5/16"	T4-5HDPE	.21	.26	.38
1/4" NPT • 3/8"	T4-6NN	.21	.26	.38	1/4" NPT • 3/8"	T4-6HDPE	.21	.26	.38
1/4" NPT • 1/2"	T4-8NN	.23	.29	.38	1/4" NPT • 1/2"	T4-8HDPE	.23	.29	.42
3/8" NPT • 1/4"	T6-4NN	.23	.29	.38	3/8" NPT • 1/4"	T6-4HDPE	.23	.29	.42
3/8" NPT • 5/16"	T6-5NN	.23	.29	.38	3/8" NPT • 5/16"	T6-5HDPE	.23	.29	.42
3/8" NPT • 3/8"	T6-6NN	.23	.29	.38	3/8" NPT • 3/8"	T6-6HDPE	.23	.29	.42
3/8" NPT • 1/2"	T6-8NN	.24	.30	.44	3/8" NPT • 1/2"	T6-8HDPE	.24	.30	.44
1/2" NPT • 1/4"	T8-4NN	.25	.31	.46	1/2" NPT • 1/4"	T8-4HDPE	.25	.33	.48
1/2" NPT • 3/8"	T8-6NN	.25	.31	.46	1/2" NPT • 3/8"	T8-6HDPE	.25	.31	.46
1/2" NPT • 1/2"	T8-8NN	.25	.31	.46	1/2" NPT • 1/2"	T8-8HDPE	.25	.33	.48
1/2" NPT • 3/4"	T8-12NN	.32	.40	.59	1/2" NPT • 3/4"	T8-12HDPE	.31	.39	.48
3/4" NPT • 1/4"	T12-4NN	.32	.40	.59	3/4" NPT • 1/4"	T12-4HDPE	.31	.39	.48
3/4" NPT • 3/8"	T12-6NN	.32	.40	.59	3/4" NPT • 3/8"	T12-6HDPE	.31	.39	.48
3/4" NPT • 1/2"	T12-8NN	.32	.40	.59	3/4" NPT • 1/2"	T12-8HDPE	.31	.39	.48
3/4" NPT • 3/4"	T12-12NN	.32	.40	.59	3/4" NPT • 3/4"	T12-12HDPE	.31	.39	.48
3/4" NPT • 1"	T12-16NN	.38	.45	.66	3/4" NPT • 1"	T12-16HDPE	.37	.46	.68
1" NPT • 1"	T16-16NN	.38	.45	.66	1" NPT • 1"	T16-16HDPE	.37	.46	.68

[< Back](#)[< More](#)

ISO 9001



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

[Natural Nylon](#)

Reduction Barbed Tees



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

[High Density Polyethylene](#)

Body(2)-Leg	Part Number	500+ / piece	100+ / piece	10-100 / piece	Body(2)-Leg	Part Number	500+ / piece	100+ / piece	10-100 / piece
5/32" • 3/8"	RT2.5-6NN	.23	.29	.42	5/32" • 3/8"	RT2.5-6HDPE	.16	.20	.29
1/2" • 3/8"	RT8-6NN	.23	.29	.42	1/2" • 3/8"	RT8-6HDPE	.20	.25	.37
5/8" • 3/8"	RT10-6NN	.25	.31	.46	5/8" • 3/8"	RT10-6HDPE	.25	.31	.46
3/4" • 3/8"	RT12-6NN	.27	.34	.49	3/4" • 3/8"	RT12-6HDPE	.26	.33	.48
3/4" • 1/2"	RT12-8NN	.27	.34	.49	3/4" • 1/2"	RT12-8HDPE	.26	.33	.48



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Kynar

Thread to Barb Tees

British Standard Pipe Thread

ISO 9001

Natural Polypropylene

Good Chemical Resistance

Natural Polypropylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" BSPT • 5/32"	T2B-2.5NK	.74	.93	1.35	1/8" BSPT • 5/32"	T2B-2.5NP	.21	.26	.38
1/8" BSPT • 1/4"	T2B-4NK	.76	.95	1.39	1/8" BSPT • 1/4"	T2B-4NP	.21	.26	.38
1/8" BSPT • 3/8"	T2B-6NK	.79	.99	1.45	1/8" BSPT • 3/8"	T2B-6NP	.21	.26	.38
1/4" BSPT • 5/32"	T4B-2.5NK	.82	1.03	1.50	1/4" BSPT • 5/32"	T4B-2.5NP	.21	.26	.38
1/4" BSPT • 3/16"	T4B-3NK	.82	1.03	1.50	1/4" BSPT • 3/16"	T4B-3NP	.21	.26	.38
1/4" BSPT • 1/4"	T4B-4NK	.84	1.05	1.54	1/4" BSPT • 1/4"	T4B-4NP	.21	.26	.38
1/4" BSPT • 5/16"	T4B-5NK	.86	1.08	1.57	1/4" BSPT • 5/16"	T4B-5NP	.21	.26	.38
1/4" BSPT • 3/8"	T4B-6NK	.88	1.10	1.61	1/4" BSPT • 3/8"	T4B-6NP	.21	.26	.38
1/4" BSPT • 1/2"	T4B-8NK	.93	1.16	1.70	1/4" BSPT • 1/2"	T4B-8NP	.23	.29	.42
3/8" BSPT • 1/4"	T6B-4NK	.96	1.20	1.76	3/8" BSPT • 1/4"	T6B-4NP	.23	.29	.42
3/8" BSPT • 5/16"	T6B-5NK	.99	1.24	1.81	3/8" BSPT • 5/16"	T6B-5NP	.23	.29	.42
3/8" BSPT • 3/8"	T6B-6NK	1.00	1.25	1.83	3/8" BSPT • 3/8"	T6B-6NP	.23	.29	.42
3/8" BSPT • 1/2"	T6B-8NK	1.03	1.29	1.88	3/8" BSPT • 1/2"	T6B-8NP	.24	.30	.44

Polypropylene fittings are not NSF certified

ISO 9001

Thread to Barb Tees

British Standard Pipe Thread



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon




Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

High Density Polyethylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" BSPT • 5/32"	T2B-2.5NN	.21	.26	.38	1/8" BSPT • 5/32"	T2B-2.5HDPE	.21	.26	.38
1/8" BSPT • 1/4"	T2B-4NN	.21	.26	.38	1/8" BSPT • 1/4"	T2B-4HDPE	.21	.26	.38
1/8" BSPT • 3/8"	T2B-6NN	.21	.26	.38	1/8" BSPT • 3/8"	T2B-6HDPE	.21	.26	.38
1/4" BSPT • 5/32"	T4B-2.5NN	.21	.26	.38	1/4" BSPT • 5/32"	T4B-2.5HDPE	.21	.26	.38
1/4" BSPT • 3/16"	T4B-3NN	.21	.26	.38	1/4" BSPT • 3/16"	T4B-3HDPE	.21	.26	.38
1/4" BSPT • 1/4"	T4B-4NN	.21	.26	.38	1/4" BSPT • 1/4"	T4B-4HDPE	.21	.26	.38
1/4" BSPT • 5/16"	T4B-5NN	.21	.26	.38	1/4" BSPT • 5/16"	T4B-5HDPE	.21	.26	.38
1/4" BSPT • 3/8"	T4B-6NN	.21	.26	.38	1/4" BSPT • 3/8"	T4B-6HDPE	.21	.26	.38
1/4" BSPT • 1/2"	T4B-8NN	.23	.29	.42	1/4" BSPT • 1/2"	T4B-8HDPE	.23	.29	.42
3/8" BSPT • 1/4"	T6B-4NN	.23	.29	.42	3/8" BSPT • 1/4"	T6B-4HDPE	.23	.29	.42
3/8" BSPT • 5/16"	T6B-5NN	.23	.29	.42	3/8" BSPT • 5/16"	T6B-5HDPE	.23	.29	.42
3/8" BSPT • 3/8"	T6B-6NN	.23	.29	.42	3/8" BSPT • 3/8"	T6B-6HDPE	.23	.29	.42
3/8" BSPT • 1/2"	T6B-8NN	.24	.30	.44	3/8" BSPT • 1/2"	T6B-8HDPE	.24	.30	.44



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Kynar

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" NPT	N2NK	.58	.73	1.06	1/8" NPT	N2NP	.13	.16	.24
1/4" NPT	N4NK	.64	.80	1.17	1/4" NPT	N4NP	.14	.18	.26
3/8" NPT	N6NK	.75	.94	1.37	3/8" NPT	N6NP	.14	.18	.26
1/2" NPT	N8NK	.86	1.08	1.57	1/2" NPT	N8NP	.17	.21	.31
3/4" NPT	N12NK	1.09	1.36	1.99	3/4" NPT	N12NP	.20	.25	.37
1" NPT	N16NK	1.28	1.60	2.34	1" NPT	N16NP	.33	.41	.60
10-32 UNF	KNNK*	0.15	0.19	0.27					
10-32 Taper	XNNK*	0.15	0.19	0.27					

* Limited supply * not NSF certified

Polypropylene fittings are not NSF certified



Natural Polypropylene

Good Chemical Resistance

Natural Polypropylene

Threaded Hex Nipples



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8" NPT	N2NN	.14	.18	.26	1/8" NPT	N2HDPE	.13	.16	.24
1/4" NPT	N4NN	.17	.21	.31	1/4" NPT	N4HDPE	.14	.18	.26
3/8" NPT	N6NN	.17	.21	.31	3/8" NPT	N6HDPE	.14	.18	.26
1/2" NPT	N8NN	.18	.23	.33	1/2" NPT	N8HDPE	.17	.21	.31
3/4" NPT	N12NN	.21	.26	.38	3/4" NPT	N12HDPE	.20	.25	.37
1" NPT	N16NN	.36	.45	.66	1" NPT	N16HDPE	.33	.41	.60




Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

High Density Polyethylene



Benefits of Eldon James Corp. Polypropylene Fittings

- » Polypropylene, like most of the polyolefins is highly resistant to solvents and chemicals. polypropylene has outstanding resistance to water and other inorganic environments. It resists most strong mineral acids and bases, but like other polyolefins, it is subject to attack by oxidizing agents. Polypropylene has excellent resistance to environmental stress-cracking. Acceptable sterilization methods include Gamma Radiation and Ethylene Oxide.
- » More information on material characteristics and chemical resistance is available on our Web site, or call Eldon James Corporation.

Certified to
NSF/ANSI 61
NSF/ANSI 51

ISO 9001

Threaded Hex Plugs



Natural Kynar (PVDF)

Ultimate Chemical Resistance


Natural Polypropylene

Good Chemical Resistance

[Natural Kynar](#)[Natural Polypropylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" NPT	P4NK	.64	.80	1.17	1/4" NPT	P4NP	.14	.18	.26
3/8" NPT	P6NK	.75	.94	1.37	3/8" NPT	P6NP	.14	.18	.26
1/2" NPT	P8NK	.86	1.08	1.57	1/2" NPT	P8NP	.17	.21	.31
3/4" NPT	P12NK	1.09	1.36	1.99	3/4" NPT	P12NP	.20	.25	.37
1" NPT	P16NK	1.28	1.60	2.34	1" NPT	P16NP	.23	.29	.42

Polypropylene fittings are not NSF certified

Certified to
NSF/ANSI 61
NSF/ANSI 51

British Standard Pipe Thread - Hex Plugs

Made in USA

[Natural Kynar](#)[Natural Polypropylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" BSPT	P4BNK	.64	.80	1.17	1/4" BSPT	P4BNP	.14	.18	.26
3/8" BSPT	P6BNK	.75	.94	1.37	3/8" BSPT	P6BNP	.14	.18	.26

Polypropylene fittings are not NSF certified



Y Connectors

Certified to
NSF/ANSI 61

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

[Natural Kynar](#)[Natural Polypropylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"	Y0-2NK	.48	.60	.88	1/8"	Y0-2NP	.25	.31	.46
3/16"	Y0-3NK	.78	.98	1.43	3/16"	Y0-3NP	.43	.54	.79
1/4"	Y0-4NK	.93	1.16	1.70	1/4"	Y0-4NP	.53	.66	.97
3/8"	Y0-6NK	2.37	2.96	4.34	3/8"	Y0-6NP	.54	.68	.99
1/2"	Y0-8NK	2.68	3.35	4.90	1/2"	Y0-8NP	.57	.71	1.04

Polypropylene fittings are not NSF certified

Benefits of Eldon James Corp. Kynar™ Fittings

- » Kynar™ (Polyvinylidene Fluoride - PVDF) is a material that has been used as a pipe liner in chemical processing plants for almost 30 years. It has been used extensively in the paper and pulp industry where high concentrations of Chlorine and Chlorine Dioxide are present. In these applications, the permeation resistance of PVDF components far surpassed that of PTFE components • PVDF products are used extensively in **silicon microcircuit fabrication**. Processes in this industry commonly use **deionized water**, a fluid that is highly corrosive to steel. The deionized water is often sanitized through the injection of **ozone and exposure to UV light**, both of which can seriously degrade the integrity of materials less durable than PVDF.
- » More information on material characteristics and chemical resistance is available on our Web site, or call Eldon James Corporation.

Threaded Hex Plugs



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

[Natural Nylon](#)



Certified to
ANSI/NSF 61
ANSI/NSF 51

High Density Natural Polyethylene

Excellent Chemical Resistance

[High Density Polyethylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" NPT	P4NN	.17	.21	.31	1/4" NPT	P4HDPE	.14	.18	.26
3/8" NPT	P6NN	.17	.21	.31	3/8" NPT	P6HDPE	.14	.18	.26
1/2" NPT	P8NN	.18	.23	.33	1/2" NPT	P8HDPE	.17	.21	.31
3/4" NPT	P12NN	.21	.26	.38	3/4" NPT	P12HDPE	.20	.25	.37
1" NPT	P16NN	.36	.45	.66	1" NPT	P16HDPE	.33	.41	.60



Certified to
NSF/ANSI 61
NSF/ANSI 51

[Natural Nylon](#)



British Standard Pipe Thread

[High Density Polyethylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" BSPT	P4BNN	.17	.21	.31	1/4" BSPT	P4BHDPE	.14	.18	.26
3/8" BSPT	P6BNN	.17	.21	.31	3/8" BSPT	P6BHDPE	.14	.18	.26

Y Connectors



Certified to
NSF/ANSI 61

Natural Nylon

Good Tensile Strength

[Natural Nylon](#)



Certified to
NSF/ANSI 61

High Density Polyethylene

Excellent Chemical Resistance

[High Density Polyethylene](#)

Size	Part Number	500+ / piece	100+ / piece	10-100 / piece	Size	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/8"	Y0-2NN	.20	.25	.37	1/8"	Y0-2HDPE	.30	.38	.55
3/16"	Y0-3NN	.38	.48	.70	3/16"	Y0-3HDPE	.48	.60	.88
1/4"	Y0-4NN	.43	.54	.79	1/4"	Y0-4HDPE	.50	.63	.92
3/8"	Y0-6NN	.54	.68	.99	3/8"	Y0-6HDPE	.54	.68	.99
1/2"	Y0-8NN	.57	.71	1.04	1/2"	Y0-8HDPE	.57	.71	1.04

Benefits of Eldon James Corp. Nylon Fittings

- » Our 66 Nylon material combines strength, moderate stiffness, high service temperature and a high level of toughness. It is particularly resistant to repeated impact, has a low coefficient of friction and excellent resistance to abrasion. It is resistant to fuels, lubricants, and several chemicals; but is not recommended for phenols, strong acids, and oxidizing agents. Acceptable sterilization methods include Ethylene Oxide or Autoclave. Eldon James™ Natural Nylon fittings are NSF Standard 61 certified.
- » More information on material characteristics and chemical resistance is available on our Web site, or call Eldon James Corporation.



Reduction Hex Nipples



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Kynar


Natural Polypropylene

Good Chemical Resistance

Natural Polypropylene

NPT • NPT	Part Number	500+ / piece	100+ / piece	10-100 / piece	NPT • NPT	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" • 1/8"	RN4-2NK	.64	.80	1.17	1/4" • 1/8"	RN4-2NP	.14	.18	.26
3/8" • 1/8"	RN6-2NK	.75	.94	1.37	3/8" • 1/8"	RN6-2NP	.14	.18	.26
3/8" • 1/4"	RN6-4NK	.75	.94	1.37	3/8" • 1/4"	RN6-4NP	.14	.18	.26
1/2" • 1/8"	RN8-2NK	.86	1.08	1.57	1/2" • 1/8"	RN8-2NP	.17	.21	.31
1/2" • 1/4"	RN8-4NK	.86	1.08	1.57	1/2" • 1/4"	RN8-4NP	.17	.21	.31
1/2" • 3/8"	RN8-6NK	.86	1.08	1.57	1/2" • 3/8"	RN8-6NP	.17	.21	.31
1" • 3/4"	RN16-12NK	1.28	1.60	2.34	1" • 3/4"	RN16-12NP	.33	.41	.60

Polypropylene fittings are not NSF certified



Certified to
NSF/ANSI 61
NSF/ANSI 51

Natural Nylon

Good Tensile Strength

Natural Nylon



Certified to
NSF/ANSI 61
NSF/ANSI 51

High Density Natural Polyethylene

Excellent Chemical Resistance

High Density Polyethylene

NPT • NPT	Part Number	500+ / piece	100+ / piece	10-100 / piece	NPT • NPT	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" • 1/8"	RN4-2NN	.17	.21	.31	1/4" • 1/8"	RN4-2HDPE	.14	.18	.26
3/8" • 1/8"	RN6-2NN	.17	.21	.31	3/8" • 1/8"	RN6-2HDPE	.14	.18	.26
3/8" • 1/4"	RN6-4NN	.17	.21	.31	3/8" • 1/4"	RN6-4HDPE	.14	.18	.26
1/2" • 1/8"	RN8-2NN	.18	.23	.33	1/2" • 1/8"	RN8-2HDPE	.17	.21	.31
1/2" • 1/4"	RN8-4NN	.18	.23	.33	1/2" • 1/4"	RN8-4HDPE	.17	.21	.31
1/2" • 3/8"	RN8-6NN	.18	.23	.33	1/2" • 3/8"	RN8-6HDPE	.17	.21	.31
1" • 3/4"	RN16-12NN	.36	.45	.66	1" • 3/4"	RN16-12HDPE	.33	.41	.60

Benefits of Eldon James Corp. Polyethylene Fittings

- » Ideal for medical applications and pure water applications
- » Fittings are NSF Standard 61 certified
- » High Gloss and Excellent Toughness
- » Excellent Chemical Resistance

High Density Polyethylene complies with US FDA 21 CFR 177.1520 © 3.2a.

- » More information on material characteristics and chemical resistance is available on our Web site, or call Eldon James Corporation.

Schedule 80 Fittings

< Back



Thread to Barb Adapters



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Natural Polypropylene

Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread - Barb	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" NPT • 1/4"	A4-4S80NK	1.00	1.25	1.83	1/4" NPT • 1/4"	A4-4S80NP	.25	.31	.46
1/4" NPT • 3/8"	A4-6S80NK	1.00	1.25	1.83	1/4" NPT • 3/8"	A4-6S80NP	.25	.31	.46
1/4" NPT • 1/2"	A4-8S80NK	1.00	1.25	1.83	1/4" NPT • 1/2"	A4-8S80NP	.25	.31	.46
3/8" NPT • 1/4"	A6-4S80NK	1.75	2.19	3.20	3/8" NPT • 1/4"	A6-4S80NP	.35	.44	.64
3/8" NPT • 3/8"	A6-6S80NK	1.75	2.19	3.20	3/8" NPT • 3/8"	A6-6S80NP	.35	.44	.64
3/8" NPT • 1/2"	A6-8S80NK	1.75	2.19	3.20	3/8" NPT • 1/2"	A6-8S80NP	.35	.44	.64
1/2" NPT • 1/4"	A8-4S80NK	2.00	2.50	3.66	1/2" NPT • 1/4"	A8-4S80NP	.50	.63	.92
1/2" NPT • 3/8"	A8-6S80NK	2.00	2.50	3.66	1/2" NPT • 3/8"	A8-6S80NP	.50	.63	.92
1/2" NPT • 1/2"	A8-8S80NK	2.00	2.50	3.66	1/2" NPT • 1/2"	A8-8S80NP	.50	.63	.92
1/2" NPT • 3/4"	A8-12S80NK	2.00	2.50	3.66	1/2" NPT • 3/4"	A8-12S80NP	.50	.63	.92
3/4" NPT • 1/4"	A12-4S80NK	2.50	3.13	4.58	3/4" NPT • 1/4"	A12-4S80NP	.60	.75	1.10
3/4" NPT • 3/8"	A12-6S80NK	2.50	3.13	4.58	3/4" NPT • 3/8"	A12-6S80NP	.60	.75	1.10
3/4" NPT • 1/2"	A12-8S80NK	2.50	3.13	4.58	3/4" NPT • 1/2"	A12-8S80NP	.60	.75	1.10
3/4" NPT • 3/4"	A12-12S80NK	2.50	3.13	4.58	3/4" NPT • 3/4"	A12-12S80NP	.60	.75	1.10
1" NPT • 1"	A16-16S80NK	3.75	4.69	6.86	1" NPT • 1"	A16-16S80NP	.75	.94	1.37

Polypropylene fittings are not NSF certified

Schedule 80 Fittings

Threaded Hex Nipples



Natural Kynar (PVDF)

Ultimate Chemical Resistance

Natural Polypropylene

Good Chemical Resistance

Natural Kynar

Natural Polypropylene



Thread	Part Number	500+ / piece	100+ / piece	10-100 / piece	Thread	Part Number	500+ / piece	100+ / piece	10-100 / piece
1/4" NPT	N4S80NK	1.00	1.25	1.83	1/4" NPT	N4S80NP	.25	.31	.46
3/8" NPT	N6S80NK	1.75	2.19	3.20	3/8" NPT	N6S80NP	.35	.44	.64
1/2" NPT	N8S80NK	2.00	2.50	3.66	1/2" NPT	N8S80NP	.50	.63	.92
1/4" NPT	N12S80NK	2.50	3.13	4.58	3/4" NPT	N12S80NP	.60	.75	1.10

Polypropylene fittings are not NSF certified