


2-WAY AIR PILOTED VALVES



Options: see page 105 **Materials:** brass body, Buna-N seals, stainless steel stem & spring

PAV-2

Air piloted normally closed 2-way poppet valve

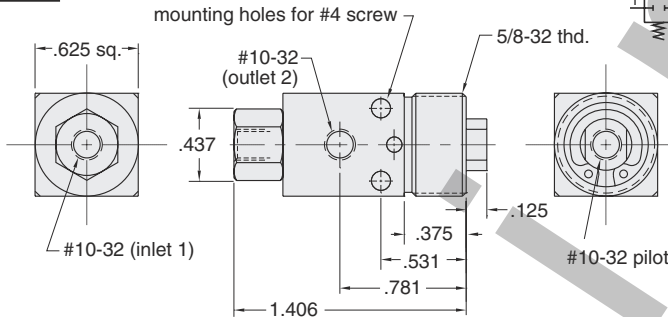

Medium: air, water, or oil

Input Pressure: 300 psig max.

Air Flow: @50 psig - 4.0 SCFM
@100 psig - 6.8 SCFM

Mounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered
part number: PAV-MH

Ports: Inlet - 10-32, Outlet - 10-32


Air Pilot Pressure: 15 psig min.

Foot Bracket: FB-1791

Temperature Range: 32° to 230° F

PAV-2P

Air piloted normally closed 2-way poppet valve

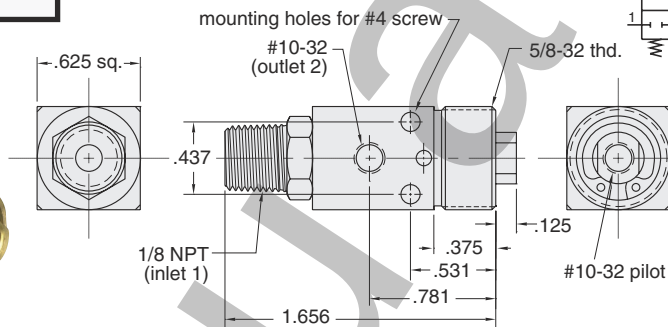

Medium: air, water, or oil

Input Pressure: 300 psig max.

Air Flow: @50 psig - 4.0 SCFM
@100 psig - 6.8 SCFM

Mounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered
part number: PAV-MH

Ports: Inlet - 1/8-27 NPT, Outlet - 10-32


Air Pilot Pressure: 15 psig min.

Foot Bracket: FB-1791

Temperature Range: 32° to 230° F

PAVO-2

Air piloted normally open 2-way poppet valve

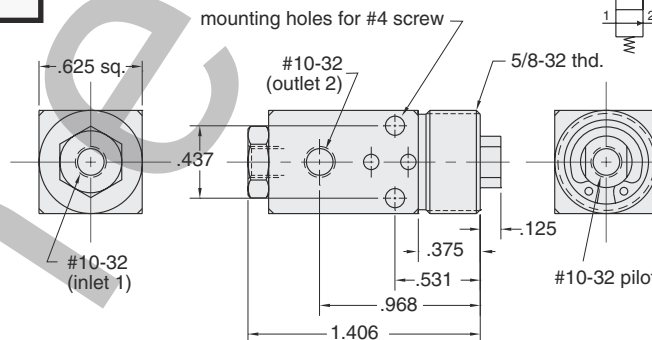

Medium: air, water, or oil

Input Pressure: 150 psig max.

Air Flow: @50 psig - 6.8 SCFM
@100 psig - 11.6 SCFM

Mounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered
part number: PAV-MH

Ports: Inlet - 10-32, Outlet - 10-32


Air Pilot Pressure: 15 psig min.

Foot Bracket: FB-1791

Temperature Range: 32° to 230° F

PAVO-2P

Air piloted normally open 2-way poppet valve

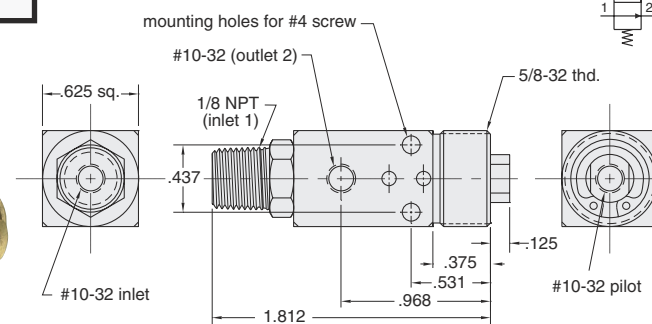

Medium: air, water, or oil

Input Pressure: 150 psig max.

Air Flow: @50 psig - 6.8 SCFM
@100 psig - 11.6 SCFM

Mounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered
part number: PAV-MH

Ports: Inlet - 1/8 NPT, Outlet - 10-32

Air Pilot Pressure: 15 psig min.

Foot Bracket: FB-1791

Temperature Range: 32° to 230° F

3-WAY AIR PILOTED VALVES




Options: see page 105

Materials: brass body, Buna-N seals, stainless steel stem & spring

PAV-3



Air piloted normally closed 3-way poppet valve

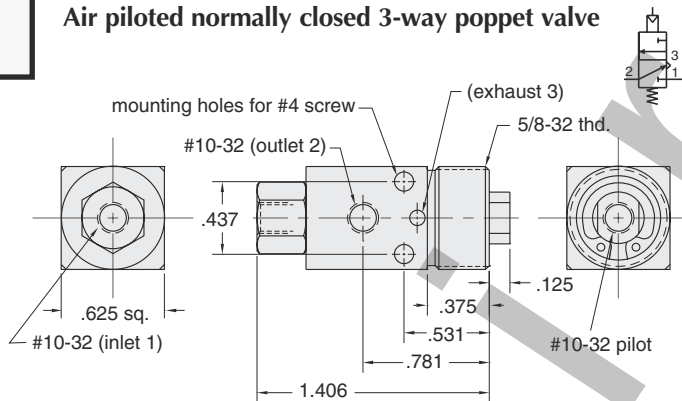

Medium: air only

Input Pressure: 300 psig max.

Air Flow: @50 psig - 4.0 SCFM
@100 psig - 6.8 SCFMMounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered part number: PAV-MH

Ports: Inlet - 10-32, Outlet - 10-32

Air Pilot Pressure: 15 psig min.


Temperature Range: 32° to 230° F

Foot Bracket: FB-1791

PAV-3P



Air piloted normally closed 3-way poppet valve

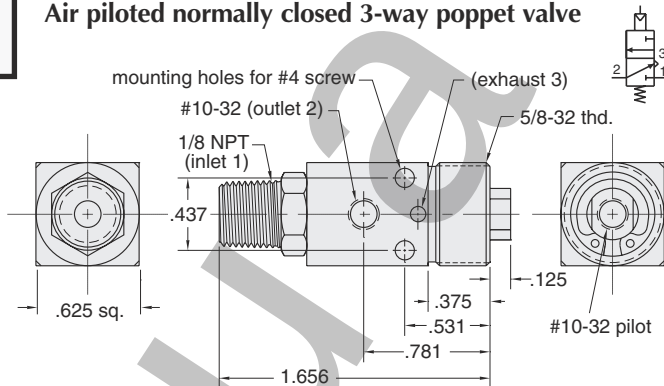

Medium: air only

Input Pressure: 300 psig max.

Air Flow: @50 psig - 4.0 SCFM
@100 psig - 6.8 SCFMMounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered part number: PAV-MH


Ports: Inlet - 1/8 NPT, Outlet - 10-32

Air Pilot Pressure: 15 psig min.


Temperature Range: 32° to 230° F

Foot Bracket: FB-1791

PAVO-3



Air piloted normally open 3-way spool, poppet valve

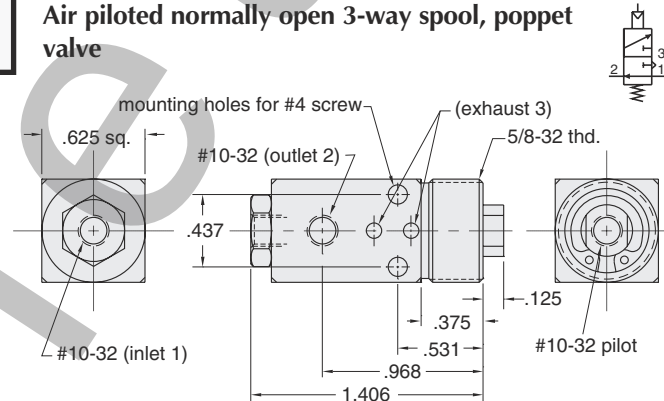

Medium: air only

Input Pressure: 150 psig max.

Air Flow: @50 psig - 6.8 SCFM
@100 psig - 11.6 SCFMMounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered part number: PAV-MH

Ports: Inlet - 10-32, Outlet - 10-32

Air Pilot Pressure: 15 psig min.


Temperature Range: 32° to 230° F

Foot Bracket: FB-1791

PAVO-3P



Air piloted normally open 3-way poppet valve

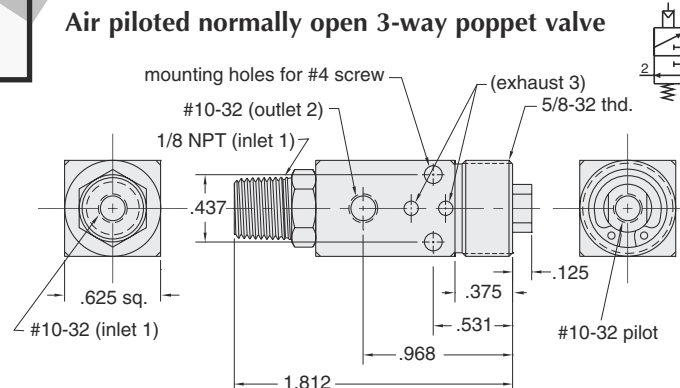

Medium: air only

Input Pressure: 150 psig max.

Air Flow: @50 psig - 6.8 SCFM
@100 psig - 11.6 SCFMMounting: 5/8-32 thread or #4 screws
Nut and lockwashers may be ordered part number: PAV-MH

Ports: Inlet - 1/8 NPT, Outlet - 10-32

Air Pilot Pressure: 15 psig min.


Temperature Range: 32° to 230° F

Foot Bracket: FB-1791




SPECIAL PILOTED 3-WAY VALVES


2010




3-way valve normally closed interface amplifies very low pressure air-jet sensing signals to working power levels

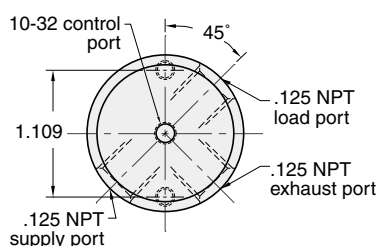


Top View



Side View

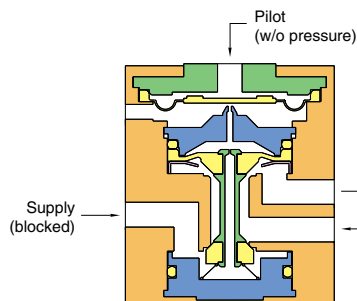

Valve Closed

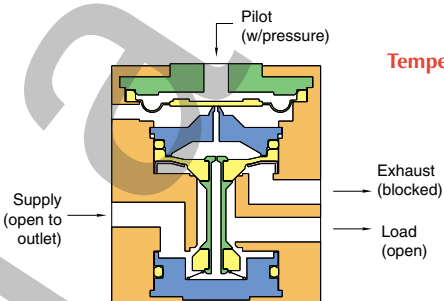

Valve Open

Medium: air

Material: anodized aluminum body, Buna-N diaphragms

Input Pressure: 30-100 psig max.

Air Flow: 22 SCFM @ 100 psig

Pilot Pressure: 4" H₂O @ 100 psig

Maximum Allowable Pilot Pressure: 5 psig

Response Time: 10 ms. dead headed

Operating Speed: 50 Hz

Bleed: 0.1 SCFM @ 100 psig


Ports: Load - 1/8 NPT female
Supply - 1/8 NPT female
Exhaust - 1/8 NPT female
Control - 10-32 female

Temperature Range: 32° to 230° F


2011-1




3-way bleed pressure piloted limit valve; blocking of the sensing port causes rapid valve opening

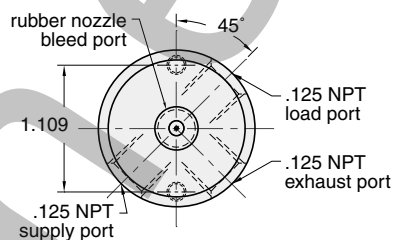


Top View



Side View

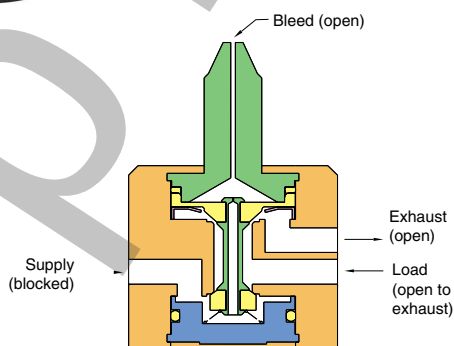

Valve Closed

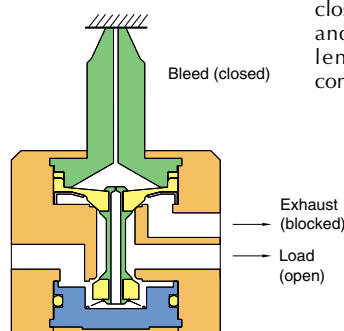

Valve Open

Medium: air

Material: anodized aluminum body, Buna-N diaphragms

Input Pressure: 30-100 psig max.

Air Flow: 22 SCFM@100 psig

Bleed: 0.1 SCFM @ 100 psig

Response Time: 15 ms.
(response time will increase)

Ports: 1/8 NPT

Temperature Range: 32° to 230° F


Note: Supplied with threaded bulkhead mount and integral rubber nozzle for direct actuation by mechanical closure. By removing rubber nozzle and inserting a 10-32 fitting and length of hose, 2011-1 can be converted to a remote sensing valve.

SPECIAL PILOTED 3-WAY VALVES




2012

3-way valve n.o. or n.c. air piloted

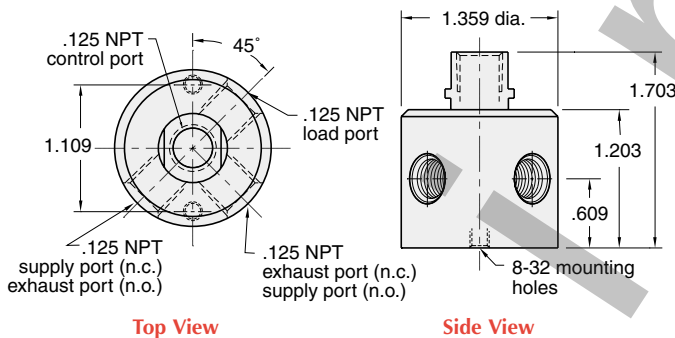**Medium:** air**Material:** anodized aluminum body, Buna-N diaphragms**Input Pressure:** 1-100 psig max.**Air Flow:** 22 SCFM @ 100 psig**Bleed:** 0.1 SCFM @ 100 psig**Minimum Pilot Pressure:**



n.o. - 90% of supply pr.

n.c. - 60% of supply pr.

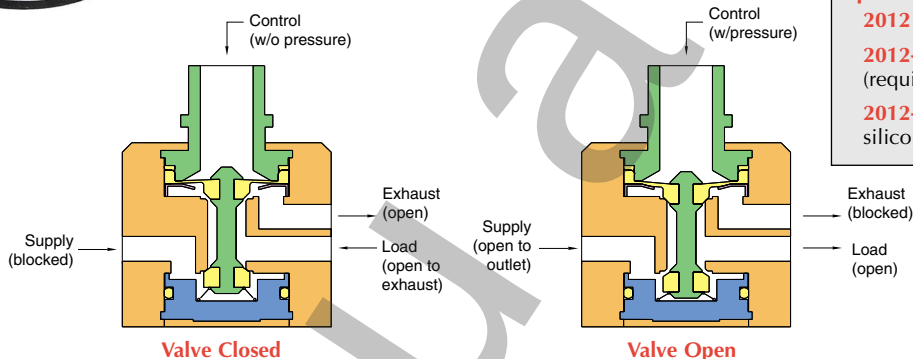Response Time: 15 ms. after pilot pressure reaches switch point**Operating Speed:** 1100 CPM**Ports:** 1/8 NPT female**Temperature Range:** 32° to 230° F**Options:****2012** standard valve**2012-VAC** for vacuum operation (requires positive pressure pilot signal)**2012-G** for use with liquid adhesives - silicone diaphragm and seals

2013 - □

3-way normally closed electronic valve with low-power DC solenoid solid state output signals can be directly converted to high pressure pneumatic power without amplification

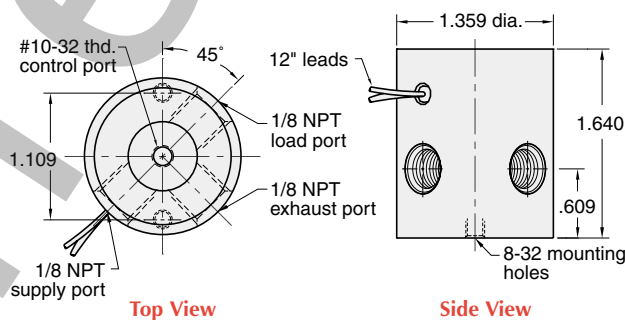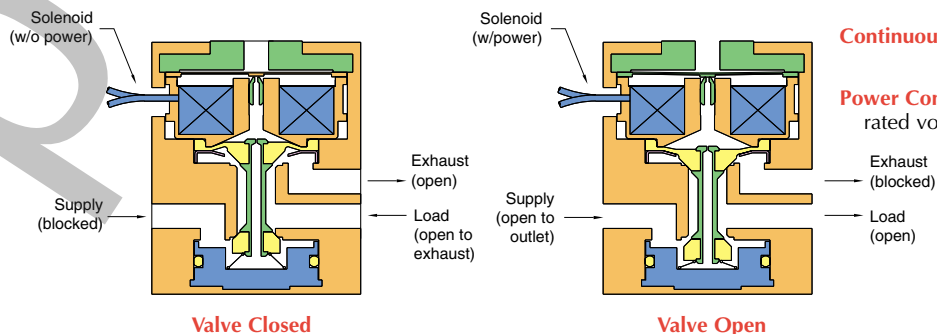**Medium:** air**Material:** anodized aluminum body, Buna-N diaphragms**Stem Travel:** 1/8"**Input Pressure:** 30-100 psig max.**Air Flow:** 22 SCFM @ 100 psig**Bleed:** 0.1 SCFM @ 100 psig**Filtration:** 10 micron**Frequency Response:** 50 Hz @ 100 psig
70 Hz @ 30 psig**Ports:** 1/8 NPT female**Switching Speed:** 10 ms.**Leads:** 28 gauge stranded P.V.C. insulated**Temperature Range:** 32° to 230° F**Standard Voltages:** 2013-6 6 volts DC,
2013-12 12 volts DC,
2013-24 24 volts DC**Continuous Overload:** 350% @ 25° C ambient;
250% @ 50° C ambient**Power Consumption:** less than 0.50 watts at rated voltage (80 ma. @ 6V
40 ma. @ 12V.
20 ma. @ 24V)



SPECIAL PILOTED 3-WAY VALVES

2020

3-way normally closed pressure piloted valve.

Designed to be piloted by a Clippard EV or ET manifold mount electronic valve. Output from the

EV/ET actuates the valve to produce outputs up to 22 SCFM at 100 psig. Combines low wattage, long life and cool running of the EV/ET valves with quick response and high flow of Clippard booster type valves.

Medium: air

Input Pressure: 30-100 psig max.

Air Flow: 22 SCFM @ 100 psig

Pilot Pressure: 60% of supply pressure, min.


Response Time: approx. 20 ms.

Ports: Inlet, outlet, exhaust 1/8 NPT
Pilot supply is 10-32 female

Mounting: Mounting holes provided

Temperature Range: 32° to 230° F

Materials: Anodized aluminum, stainless steel

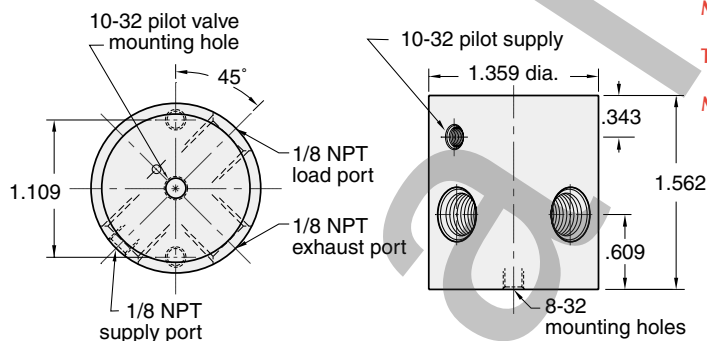

Top View

Side View



2020 shown with ET Pilot Valve and external pilot supply

2021



The 2020 and 2021 are identical in all respects except one. The 2020 has an external 10-32 port for the pressure supply to the EV/ET electronic pilot valve. The 2021 has an internal pressure supply to the EV/ET.

2050

3-way miniature valve interface

Medium: air

Input Pressure: 30-100 psig max.

Air Flow: 15 SCFM@100 psig


Pilot Pressure: 15" H₂O

Maximum Allowable Pilot Pressure:
5 psig

Response Time: 10 ms.

Ports: Inlet - 1/8 NPT male
Outlet - 1/16" NPT female
Pilot - 10-32 female

Temperature Range: 32° to 230° F

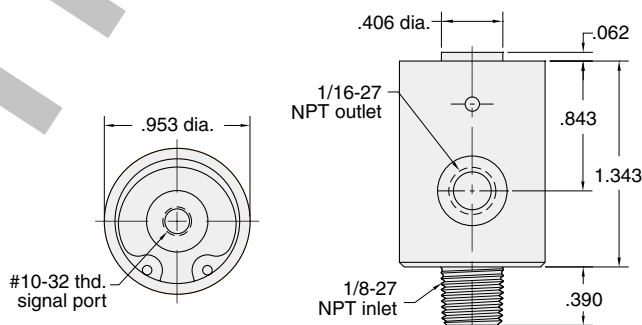

Top View

Side View

Wow! Scratch -n- Sniff photo!

ACCESSORIES AND SWITCHES




3200-A




Pressure piloted snap action amplifying valve provides a sharp, clean output signal, even with slow-changing pressure input signals; output is stabilized without chatter or oscillation

Medium: air
Input Pressure: 3-100 psig max.
Minimum Pilot Pressure: 1.5" H₂O psig
Maximum Pilot Pressure: 1psig (28" H₂O")
Air Flow: .18 SCFM@100 psig
Bleed Orifice Diameter: .010"
Ports: 10-32 female
Temperature Range: 32° to 230° F

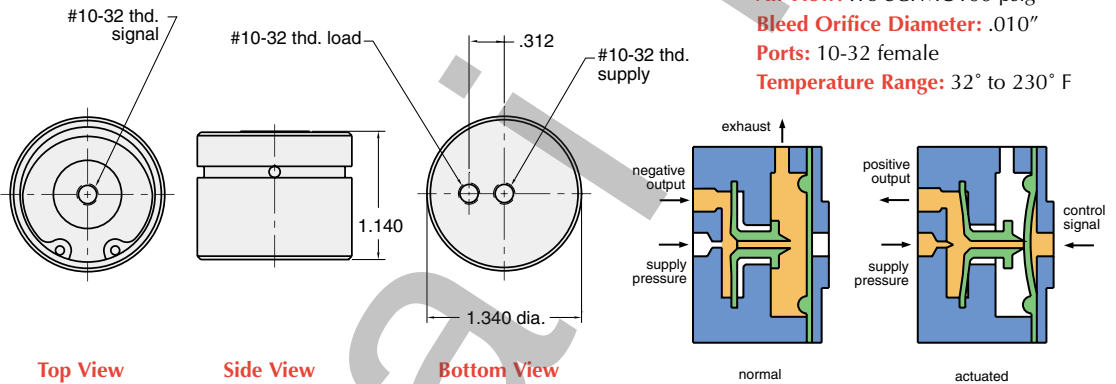

2010-050


Flat bracket to mount 2010, 2011-1, 2012 and 2013 valves.

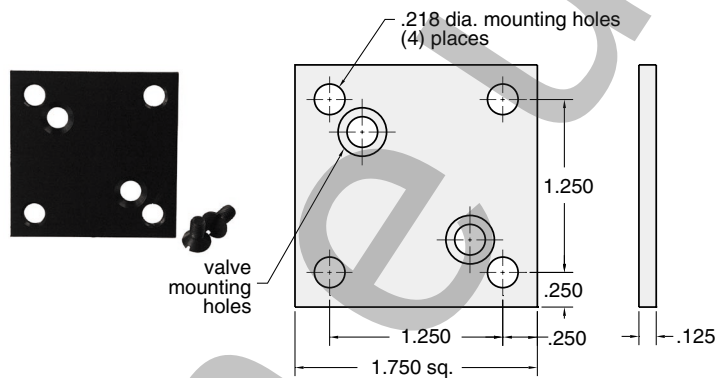

Construction: Black oxide finish, two mounting screws furnished.


9002-01

1/8 NPT hex nipple with 40 micron filter / strainer, can be used as a muffler

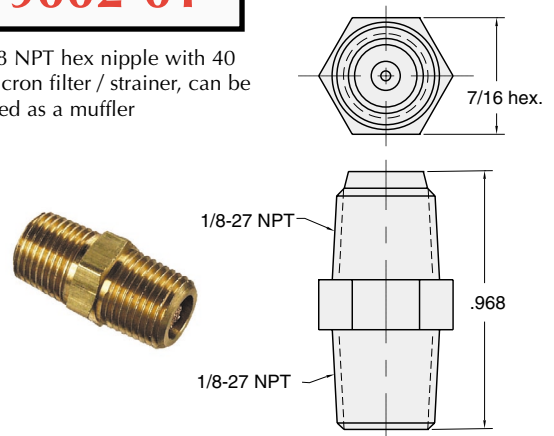


2011-012

10-32 rubber nozzles for replacement 2011-1 limit valves. 10-32 thread, five to a package.

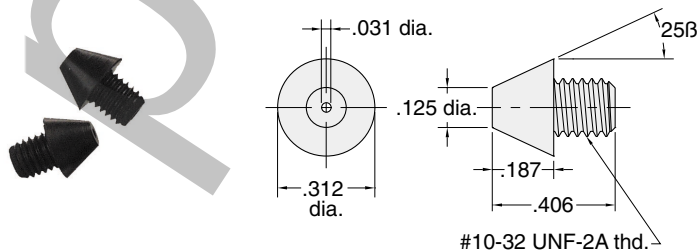


3200-006


Mounting bracket for 3200-A snap action relays.

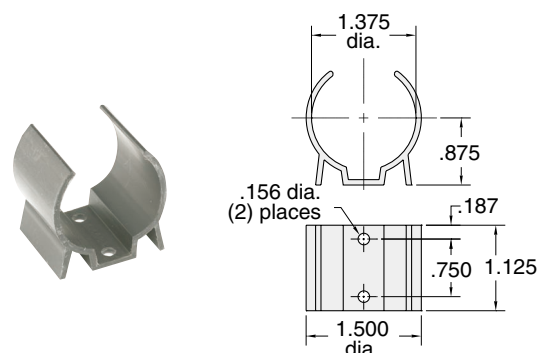

E4-1 PS-00-000

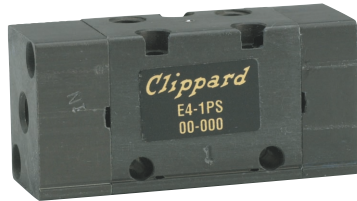

Single pneumatic spring

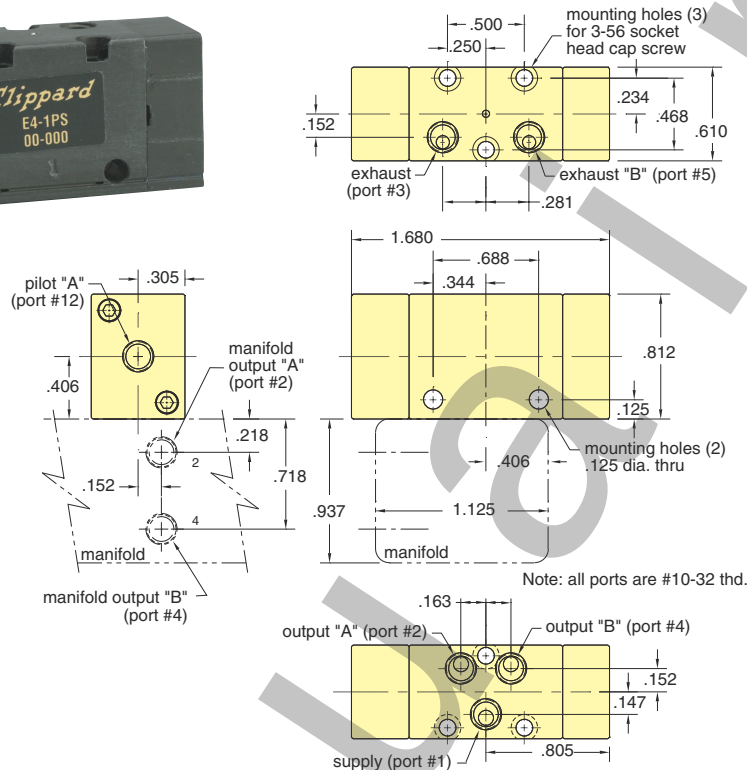

Note: all ports are #10-32 thd.

Type: 4-way 2-position spool valve

Medium: air (lubricated or non-lubricated); moderate vacuum

Flow Rate: *(CV 0.14 9.3 scfm @ 100 psig/
5 scfm @ 50 psig

Operating Pressure: 0 to 105 psig

Vacuum: 25 inHg


Mounting: There are three mounting holes for 3-56 screws

Ports: Valve body tapped for 10-32 ports
(M5 metric optional)

E4-1 PP-00-000



Double pneumatic pilot

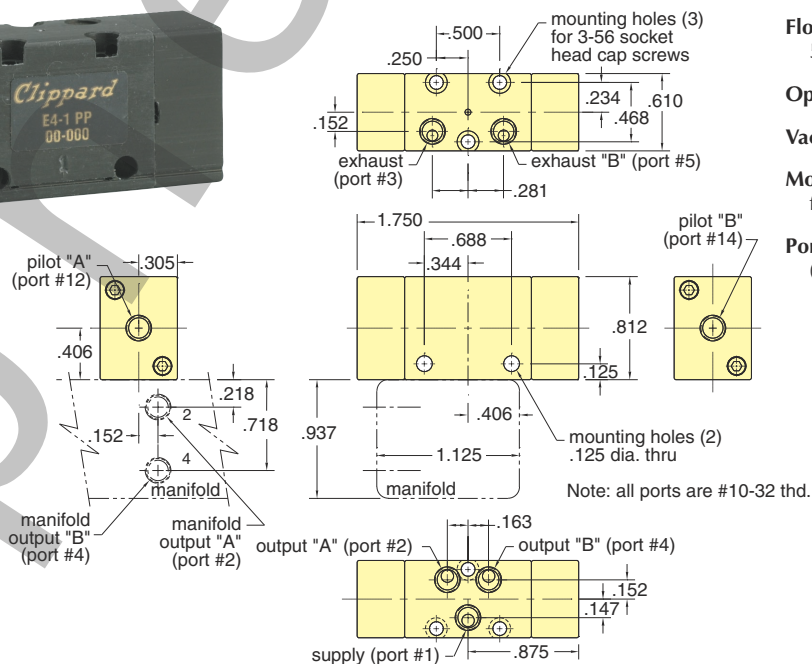

Note: all ports are #10-32 thd.

Type: 4-way 2-position spool valve

Medium: air (lubricated or non-lubricated); moderate vacuum

Flow Rate: *(CV 0.14 9.3 scfm @ 100 psig/
5 scfm @ 50 psig

Operating Pressure: 0 to 105 psig

Vacuum: 25 inHg

Mounting: There are three mounting holes for 3-56 screws

Ports: Valve body tapped for 10-32 ports
(M5 metric optional)