


# Series CA2

ø40, ø50, ø63, ø80, ø100

Replacement Procedure is p.284

## Construction

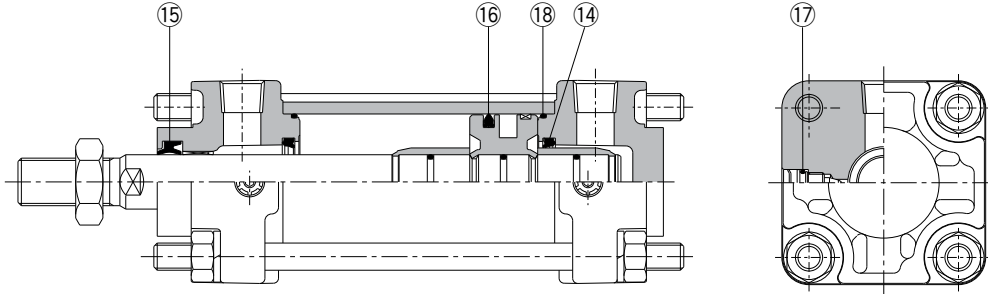

\* The numbers are the same as the "Construction" of the Best Pneumatics No.2 Series CA2.

\*[BLUE](#) links will lead to purchase pages.

### Seal Kit List

No.	Description	Material	Note
14	Cushion seal	Urethane	17 is a non-replaceable part, so it is not included in the seal kit.
15	Rod seal	NBR	
16	Piston seal	NBR	
17	Cushion valve seal	NBR	
18	Cylinder tube gasket	NBR	

### Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
40	<a href="#">MB40-PS</a>	Set of left nos. (14, 15, 16, 18).
50	<a href="#">MB50-PS</a>	
63	<a href="#">MB63-PS</a>	
80	<a href="#">MB80-PS</a>	
100	<a href="#">MB100-PS</a>	

\* Seal kit includes 14, 15, 16 and 18. Order the seal kit based on each bore size.

\* Do not disassemble the trunnion style.

\* Seal kit includes a grease pack (ø40, 50: 10 g, ø63, 80: 20 g, ø100: 30 g).

Order with the following part number when only the grease pack is needed.

**Grease pack part no.:** GR-S-010 (10 g), GR-S-020 (20 g)

Actuators

Modular F.R.L.  
Pressure Control Equipment

Air Preparation  
Equipment

Industrial Filters

Replacement  
Procedure

Actuators

Modular F.R.L.  
Pressure Control Equipment

Industrial Filters